



LIGHTING PRODUCT CATALOGUE

10+
YEARS
INDUSTRY
EXPERIENCE

About Us



Unicor is professionally managed and run by an experienced driven management team. It has a highly qualified technical team that provides comprehensive lighting solutions including requirement assessment, lighting designs and energy and payback calculations.

Its dedicated and expanding sales team has deployed industry best practices to develop strong relationships with trade and large institutions.

The extended Unicor team of distributors and dealers across the country ensure excellent service support and timely delivery as per the needs of the customers.



INDEX

Indoor Lighting

Page No.

Trimless Deep COB Light	5
COB Movable Light	5
Deep Recessed Downlight	6
Slim Conceal Downlight	6
Slim Surface Downlight	7
Panel Light	7
COB Cylinder Light	8
Track Light	8
Surface Track Light	9
Linear COB Light	9
Indoor Wall Light	10-16
Mirror Light	17
Hanging Light	18-22
Architectural Light	23-26
Chandelier	27-29
Rope	30
Strip Light	31
Profile Light Housing	32
Tubelight	33
Bulb	34

Outdoor Lighting

Street Light	36-37
Flood Light	38-40
Outdoor Wall Light	41-44
Heritage Wall Light	45-46
Gate Light	47-49
Foot Light	50
Solar Street Light	51
Solar Power Plant	51
Driver & SPD	52-53

Landscape Lighting

Bollard	55-61
Spike Light	62
Inground Burial Light	63
Underwater Light	64

Pole Lighting

Modern Pole Light	66-72
Heritage Pole Light	74-78
Post Top Light	80-85
Pole	86-87

Industrial Lighting

High Bay Light	89
Well Glass	90
Flame Proof Well Glass	90
Flame Proof Tube Light	90
Pit Light	91
Canopy Light	92
Bulkhead	92
Industrial Batten	93

Facade Lighting

Mono Color Wall Washer Light	95
RGBW Wall Washer Light	96-97
Mono Color Flood Light	98
RGBW Flood Light	99
RGBW ROUND Flood Light	100
NEON Linear Flexible Light	101
DOT Pixel Light	102
LED Linear Pixel Light	103
3D LED Tube	104
Marker Light	105

Motif Lighting

Motif Light	106
-------------	-----

A modern office interior featuring a reception desk with a light wood finish and a grey countertop. The desk is positioned in the center of the frame. Above the desk, a large, square, recessed ceiling structure is illuminated with warm white light, creating a focal point. The ceiling is composed of white acoustic tiles with several rectangular recessed light fixtures. The walls are a neutral light grey, and the floor is covered in a grey and white patterned carpet. In the background, there are glass partitions, wooden doors, and framed artwork on the walls. The overall atmosphere is clean, professional, and well-lit.

**INDOOR
LIGHTING**

TRIMLESS DEEP COB LIGHT

Model No.	Wattage	Dimension Cutout(MM)	Length (MM)
UIL-005-8	8 W	55	60
UIL-005-15	15 W	75	80
UIL-005-20	20 W	85	100

Specifications

Material	: Aluminium
Shape	: Round
Beam Angle	: 38°
Body Color	: White / Black
Surge Protection	: Upto 2.5 KVA
Ingress Protection	: IP20
Lumen Efficacy	: Upto 100 Lumen / W
Color Rendering Index	: > 80
Power Factor	: > 0.9
Input Voltage	: 170 V - 270 V AC
Reflector Color	: Rose Gold, Black, Chrome



Color Temperature : 6500K / 4000K / 3000 K / 3 in 1 / CCT Dimmable, Tunable

MOVABLE COB LIGHT

Model No.	Wattage	Dimension Cutout (MM)	Length (MM)
UIL-004-3	3 W	55	40
UIL-004-8	8 W	75	50
UIL-004-15	15 W	95	60
UIL-004-24	24 W	125	70
UIL-004-30	30 W	140	80
UIL-004-36	36 W	140	80

Specifications

Material	: Aluminium
Shape	: Round
Beam Angle	: 38°
Body Color	: White / Black
Surge Protection	: Upto 2.5 KVA
Ingress Protection	: IP20
Lumen Efficacy	: Upto 100 Lumen / W
Color Rendering Index	: > 80
Power Factor	: > 0.9
Input Voltage	: 170 V - 270 V AC



Color Temperature : 6500K / 4000K / 3000 K / 3 in 1 / CCT Dimmable, Tunable



Specifications

Input Voltage	: 170 V - 270 V AC
Power Factor	: > 0.9
Ingress Protection	: IP20
Lumen Efficacy	: Upto 120 Lumen / W
Color Rendering Index	: > 80
Life Span	: 50000 Hours
EMC / EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2
Material	: Aluminium
Shape	: Round
Beam Angle	: 120°
Color Temperature	: 3000K / 4000K / 6000 K / 3 in 1 CCT Dimmable, Tunable

DEEP RECESSED DOWNLIGHT

Model No.	Wattage	Dimension (MM)	Cutout (MM)
UIL-003-12	12 W	140	120
UIL-003-18	18 W	170	145
UIL-003-24	24 W	195	170



12 W



18 W



24 W



SLIM CONCEAL DOWNLIGHT

Model No.	Wattage	Dimension (MM)	Cutout (MM)
UIL-001-8-R	8 W	120	100
UIL-001-15-R	15 W	170	150
UIL-001-22-R	22 W	220	200
UIL-001-30-R	30 W	300	275
UIL-001-8-S	8 W	120	100x100
UIL-001-15-S	15 W	170	150x150
UIL-001-22-S	22 W	220	200x200
UIL-001-30-S	30 W	300	275x275

Specifications

Input Voltage	: 170 V - 270 V AC
Power Factor	: > 0.9
Color Temperature	: 3000K / 4000K / 6000 K / 3 in 1
Ingress Protection	: IP20
Lumen Efficacy	: Upto 120 Lumen / W
Color Rendering Index	: > 80
Life Span	: 50000 Hours
EMC / EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2
Material	: Aluminium
Shape	: Round / Square
Beam Angle	: 120°

SLIM SURFACE DOWNLIGHT

Model No.	Wattage	Outer Dimension (MM)
UIL-002-8-R	8 W	120
UIL-002-15-R	15 W	170
UIL-002-22-R	22 W	220
UIL-002-30-R	30 W	225
UIL-002-8-S	8 W	120 x 120
UIL-002-15-S	15 W	170 x 170
UIL-002-22-S	22 W	220 x 220
UIL-002-30-S	30 W	225 x 225



Specifications

Input Voltage	: 170 V - 270 V AC
Power Factor	: > 0.9
Color Temperature	: 3000K / 4000K / 6000 K / 3 in 1
Ingress Protection	: IP20
Lumen Efficacy	: Upto 120 Lumen / W
Color Rendering Index	: > 80
Life Span	: 50000 Hours
EMC / EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2
Material	: Aluminium
Shape	: Round / Square
Beam Angle	: 120°

PANEL LIGHT

Model No.	Wattage	Size (feet)
UIL-10-36-C	36 W	2 X 2
UIL-10-45-C	45 W	2 X 2
UIL-10-60-C	60 W	2 X 2
UIL-10-40-C	40 W	4 X 1
UIL-10-50-C	50 W	4 X 1
UIL-10-36-CA	36 W	2 X 1
UIL-10-36-S	36 W	2 X 2
UIL-10-45-S	45 W	2 X 2
UIL-10-60-S	60 W	2 X 2
UIL-10-40-S	40 W	4 X 1
UIL-10-50-S	50 W	4 X 1
UIL-10-36-SA	36 W	2 X 1



Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50/60 Hz
Power Factor	: > 0.9
Color Temperature	: 3000K / 4000K / 6000 K / 3 in 1
Ingress Protection	: IP20
Lumen Efficacy	: Upto 120 Lumen / W
Color Rendering Index	: > 80
Life Span	: 50000 Hours
EMC / EMI Standard	: IEC61547 / EN55015
Harmonics	: IEC 61000-3-2
Material	: Aluminium
Shape	: Square
Beam Angle	: 120°
Mounting	: Surface / Recessed / Hanging
Housing	: Powder Coated CRCA
Diffuser	: Frosted & Prismatic
Body Color	: White

COB CYLINDER LIGHT



Model No.	Wattage	Diameter (MM)	Height (MM)
UIL-006-8	8 W	60	65
UIL-006-15	15 W	75	80
UIL-006-22	22 W	85	90

Specifications

Material	: Aluminium
Shape	: Round
Beam Angle	: 38°
Body Color	: White / Black
Reflector Color	: Rose Gold / Black
Color Temperature	: 6500K / 4000K / 3000 K

TRACK LIGHT

Model No.	Wattage	Dimension Outer (MM)	Length (MM)
UIL-007-12	12 W	50	100
UIL-007-24	24 W	60	135
UIL-007-36	36 W	80	150
UIL-007-48	48 W	90	180

Specifications

Material	: Aluminium
Shape	: Round
Beam Angle	: 38°
Body Color	: White / Black
CCT	: 6500 K / 4000 K / 3000 K



SURFACE TRACK LIGHT

Model No.	Wattage	Dimension Outer (MM)	Length (MM)
UIL-008-12	12 W	50	100
UIL-008-24	24 W	60	135
UIL-008-36	36 W	80	150
UIL-008-48	48 W	90	180



Specifications

Material	: Aluminium
Shape	: Round
Beam Angle	: 38°
Body Color	: White / Black
Color Temperature	: 6000K / 4000 K / 3000 K

LINEAR COB LIGHT



Model No.	Wattage	Dimension Cutout (MM)
UIL-009-2	2 W	45 x 45
UIL-009-4	4 W	60 x 45
UIL-009-6	6 W	90 x 45
UIL-009-10	10 W	150 x 45
UIL-009-20	20 W	300 x 45

Specifications

Material	: Aluminium
Type	: Conceal
Shape	: Rectangle
Reflector Color	: Black / Rosegold
Body Color	: White / Black
Color Temperature	: 6500K / 4000K / 3000 K / 3 in 1 / Dimmable/ Tunable

INDOOR WALL LIGHT

UIWL-01

Holder	: E27
Size	: 22 cm x 15 x 50 cm
Finish	: Golden
Material	: MS / Glass



UIWL-02

Wattage	: 10 W
Size	: D 178 mm x L 127 mm
Body Color	: Black - Gold
Color Temperature	: 3000 K / 4000 K

UIWL-03

Holder	: E27
Size	: D250 mm
Body Color	: Black



UIWL-04

Holder	: E27
Size	: D 150 mm
Body Color	: Black

UIWL-05

Holder	: E27
Size	: 200 mm x 120 mm x 180 mm
Finish	: Black, Gold, Chrome



INDOOR WALL LIGHT



UIWL-06

Holder	: E27
Size	: D 260 mm
Body Color	: Black / Rustic

UIWL-07

Holder	: E 27
Size	: D 250 mm
Body Color	: Black / Rustic



UIWL-08

Wattage	: 5 Watt
Size (LxBxH)	: 8" x 10" x 8"
Finish	: Golden

UIWL-09


Holder	: E14
Size (LxBxH)	: 12" x 5"
Finish	: Golden
Material	: MS / Glass



UIWL-10

Item Code	Input Power	Size mm (LxW)
UIWL-10-A	6 W	L 100 x W 100
UIWL-10-B	12 W	L 100 x W 200

Color Temperature : 3000 K / 4000 K, Body Color : White-Gold / Black-Gold



INDOOR WALL LIGHT

UIWL-11

Wattage	: 6 W
Size	: D 65 x H 250 mm
Body Color	: Copper / Antique
Color Temp.	: 3000 K / 4000 K



UIWL-12



Item Code	Input Power	Size mm (LxW)
UIWL-12-A	6 W	L 180 x W 110
UIWL-12-B	12 W	L 250 x W 110

Color Temperature : 3000 K / 4000 K, Body Color : Rose Gold / Antique / Chrome

UIWL-13

Wattage	: 6 W
Size	: L 100 mm x W 100 mm
Body Color	: Rustic Gold / Rustic Silver
Color Temp.	: 3000 K / 4000 K



UIWL-14



Wattage	: 1 Watt
Size	: H 300 mm
Body Color	: Black / White / Copper / Antique / SS

UIWL-15

Wattage	: 1 Watt
Size	: H 300 mm
Body Color	: Black / White / Copper / Antique / SS



INDOOR WALL LIGHT



UIWL-16

Holder	: 2 x E14
Size (LxBxH)	: 22cm x 12cm x 33cm
Finish	: Golden
Material	: SS with Crystal

UIWL-17

Wattage/Holder	: 3 W + E-27
Size	: H 150 mm x D 175 mm
Body Color	: Black / Brown / Beige / White
Color Temp.	: 3000 K / 4000 K



UIWL-18


Item Code	Input Power	Size mm
UIWL-18-A	2 x 3 W	L130 x W80 x H25
UIWL-18-B	2 x 9 W	L327 x W80 x H25
UIWL-18-C	2 x 18 W	L625 x W80 x H25



Color Temperature : 3000 K, Body Color : Black / White / Copper / Gold

UIWL-19


Wattage	: 2 x E27
Size	: L12" x B4" x H6"
Body Color	: Golden / Milky White Glass
Color Temp.	: MS / Glass



INDOOR WALL LIGHT

UIWL-20

Holder	: 2 x E27
Size (LxBxH)	: 7" x 7" x 10"
Finish	: Black / Golden
Material	: MS / Glass




UIWL-21

Holder	: E27
Size (LxBxH)	: 6" x 6" x 20"
Finish	: Golden / Crome
Material	: MS / Glass

UIWL-22

Holder	: E27
Size (LxBxH)	: 8" x 8" x 12"
Finish	: Black + Gold



UIWL-23


Holder	: E27
Size (LxBxH)	: 8" x 10" x 8"
Finish	: Gold + Black

UIWL-24

Holder	: E27
Size (LxBxH)	: 6" x 6" x 16"
Finish	: Golden



INDOOR WALL LIGHT




UIWL-25

Wattage	: 5 Watt
Size	: D 200 mm
Finish	: Antique Copper / Brass

UIWL-26

Wattage	: 5 Watt
Size (LxW)	: 8" x 4"
Finish	: Chrome / Glass



UIWL-27

Wattage	: 3 w
Size (HxW)	: 12" x 4"
Finish	: Matt Black

UIWL-28

Holder	: E 27
Size (LxW)	: 8" x 6"
Finish	: Chrome / Glass



UIWL-29

Holder	: E 27
Size (LxW)	: 10" x 8 "
Finish	: Chrome / Glass

INDOOR WALL LIGHT

UIWL-30

Model	: UIWL-30-A
	: UIWL-30-B
Holder	: A-1 x E27, B-2 x E27
Size	: A- 8" x 8", B- 12" x 8"
Finish	: Chrome / Glass



UIWL-31

Model	: UIWL-31-A
	: UIWL-31-B
Holder	: A-1 x E27, B-2 x E27
Size	: A- 8" x 8", B- 12" x 8"
Finish	: Chrome / Glass

UIWL-32

Item Code	Input Power	Size mm (LxW)
UIWL-32-A	5 W	Ø 50 x 190 mm
UIWL-32-B	10 W	Ø 50 x 250 mm
UIWL-32-C	15 W	Ø 50 x 410 mm

Color Temperature : 3000 K / 4000 K, Body Color : Black / White



UIWL-33

Item Code	Input Power	Size mm (LxW)
UIWL-33-A	5 W	Ø 50 x 190 mm
UIWL-33-B	10 W	Ø 50 x 250 mm
UIWL-33-C	15 W	Ø 50 x 410 mm

Color Temperature : 3000 K / 4000 K, Body Color : Black / White



MIRROR LIGHT

UML-01

Item Code	Input Power	Size mm (LxWxH)
UML-01-A	6 W	175 x 110 x 50
UML-01-B	9 W	275 x 110 x 50
UML-01-C	12 W	370 x 110 x 50

Color Temperature : 3000 K / 4000 K / 6000 k, Body Color : White



UML-02

Item Code	Input Power	Size mm (LxWxH)
UML-02-A	10 W	290 x 195 x 190
UML-02-B	18 W	420 x 220 x 250

Color Temperature : 3000 K / 4000 K / 6000 K, Body Color : White / Wood / Antique



UML-03

Item Code	Input Power	Size mm (LxWxH)
UML-03-A	10 W	310 x 180 x 180
UML-03-B	18 W	410 x 180 x 180

Color Temperature : 3000 K / 4000 K / 6000 K
Body Color : White / Wood / Ant. Brass / Ant. Copper / SS



UML-04

Item Code	Input Power	Size mm (LxW)
UML-04-A	6 W	225 x 90
UML-04-B	12 W	420 x 80
UML-04-C	20 W	620 x 80

Color Temperature : 3000 K / 4000 K / 6000 K, Body Color : White / Black / Wood



HANGING LIGHT

UHL-01

Holder	: E27
Size	: D 250 mm
Body Color	: Copper-WH / Gold-WH, WH-WH / BK-WH / Grey-WH
Material	: Metal



UHL-02

HOLDER	: E27
Size	: D 300, D 400 x H 1600 mm
Body Color	: Rustic Copper
Color Temperature	: Metal



UHL-03

Holder	: E27
Size	: D 300, D400 x H 1600 mm
Body Color	: Antique Copper + Gold Antique Brass + Gold



UHL-04

Wattage	: 15 W / 30 W / 36 W
Size	: D 150 / D 300 / D 400 mm
Body Color	: White / Black
Color Temperature	: 3000 K / 4000 K / 6000 K



UHL-05

Holder	: E27
Size	: D 400 x H 500 mm
Body Color	: Black



HANGING LIGHT



UHL-06

Holder	: E27
Size	: D 350 mm
Body Color	: Black / White



UHL-07

HOLDER	: E27
Size	: D 203 mm
Body Color	: Clear White



UHL-08

Holder	: E27
Size	: D 330, H 394 mm
Body Color	: Black / White / Gold

UHL-09

Holder	: E27
Size	: D 210 / 280 mm
Body Color	: Copper, Gold, Chrome



UHL-10

Holder	: E27
Size	: D 300 x H 200 mm
Body Color	: BK - WH / WH - WH

HANGING LIGHT

UHL-11

Watter	: 6 W
Size	: D 70 X H 300 mm
Body Color	: Copper / Antique
Color Temp.	: 3000 K / 4000 K



UHL-12

HOLDER	: E27
Size	: D 280 mm
Body Color	: BK - GD / WH - GD
Color Temperature	: 3000 K / 4000 K

UHL-13

Holder	: E27
Size	: D 300 mm
Body Color	: Grey-WH / GR-WH / PK-WH/ YL-WH



UHL-14-A & UHL-14-B

Wattage	: E27
Size	: A-D400, B-D300 mm
Body Color	: Black-Gold, White-Gold WH-WH, WH-OR



UHL-15

Wattage	: 5 W
Size	: L 300 x D 27 mm
Body Color	: Black / White / Wood / ATK / Copper
Color Temp.	: 3000 K / 4000K



HANGING LIGHT



UHL-16

Holder	: E27
Size	: D 250 mm
Body Color	: BK-WH / WH-WH

UHL-17

HOLDER	: E27
Size	: D 250 mm
Body Color	: BK-GD / WH-GD



UHL-18

Wattage	: 35 W
Size	: D 420 mm
Body Color	: Black / White



UHL-19

Holder	: E27
Size	: D 330 mm
Body Color	: BK-WH / WH - WH / PK-WH / YL - WH / GR -WH




UHL-20

Holder	: E 27
Size (L x B)	: 6" x 10"
Finish	: Golden



HANGING LIGHT



UHL-21

Holder	: E27
Size	: 8", 10", 12"
Finish	: Golden



UHL-22

Holder	: E27
Size	: 8" x 6"
Body Color	: Golden Luster

UHL-23

Holder	: E 27
Size	: 12" x 5"
Finish	: Golden



UHL-24

Wattage	: 62 Watt
Size	: D 300 mm, D450 mm, D600 mm
Finish	: White, Black, Brown, Gold, Rose Gold
Note	: Can be customized to any Size

UHL-25

Wattage	: 100 Watt
Size	: 300x300, 450x450, 600x600, 750x750
Finish	: White, Black, Brown, Gold, Rose Gold
Note	: Can be customized to any Size



UHL-26

Wattage	: 70 Watt
Size	: 300 mm, 600 mm, 900 mm
Finish	: White, Black, Brown, Gold, Rose Gold

ARCHITECTURAL LIGHT

PLANO



Size (mm)	600	1200	1800	2400	3600
Wattage	20 W	40 W	60 W	80 W	120 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Profile Size	: 50 x 70 (mm)
Mounting	: Suspended & Surface

POLAR

Size (mm)	1200	1800	2400
Wattage	40 W	60 W	80 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Profile Size	: 35 x 70 (mm)
Mounting	: Suspended & Surface




ARISE

Size (mm)	1200	1800	2400
Wattage	45 W	70 W	90 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Profile Size	: 35 x 70 (mm)
Mounting	: Suspended & Surface

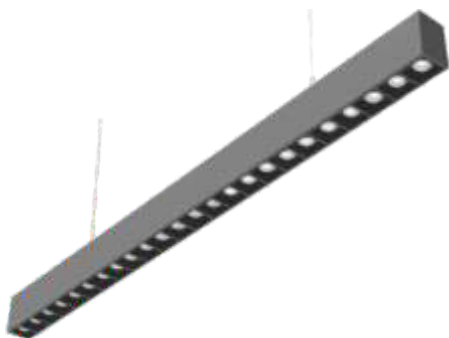


ARCHITECTURAL LIGHT

SQUARDO

Size (mm)	300 x 300	600 x 600	1200 x 1200	1800 x 1800
Wattage	40 W	80 W	120 W	240 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Profile Size	: 50 x 70 (mm)
Mounting	: Suspended & Surface

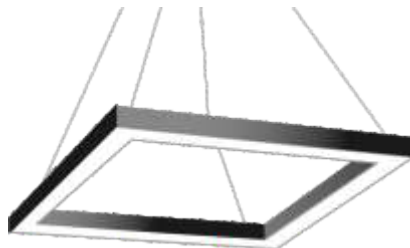


RECTO

Size (mm)	600x300	900x450	1200x600	1500x750	1800x900
Wattage	60 W	90 W	120 W	150 W	180 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Profile Size	: 50 x 70 (mm)
Mounting	: Suspended & Surface

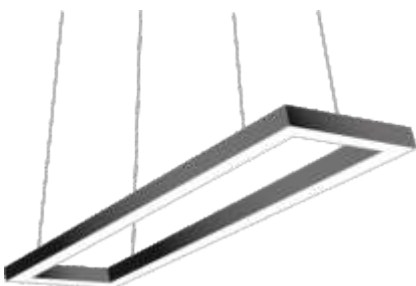


ARCEDO

Size (mm)	Wattage
300x300x300	30 W
600x600x600	60 W
900x900x900	90 W
1200x1200x1200	120 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Profile Size	: 50 x 70 (mm)
Mounting	: Suspended & Surface

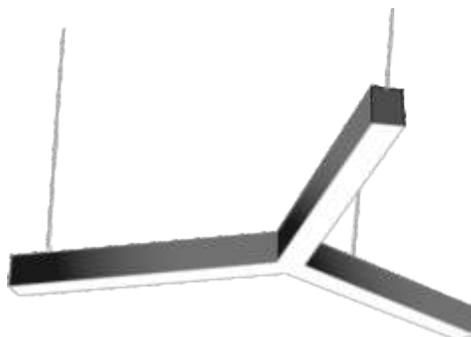

ARCHITECTURAL LIGHT

ERIS (DRUM)



Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Mounting	: Suspended & Surface

Size Dia (mm)	Wattage
300 (W 50 x H 50)	30 W
450 (W 50 x H 50)	36 W
600 (W 50 x H 50)	40 W
750 (W 75 x H 50)	50 W
900 (W 75 x H 50)	80 W
1200 (W 75 x H 50)	120 W
1500 (W 75 x H 50)	150 W


ERIS

Size Dia (mm)	Wattage
300 (H 50)	30 W
450 (H 50)	36 W
600 (H 50)	40 W
750 (H 50)	50 W
900 (H 50)	80 W
1200 (H 50)	120 W



Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Mounting	: Suspended & Surface

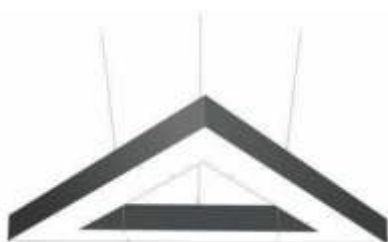

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Mounting	: Suspended & Surface

TRINO

Size Dia (mm)	Wattage
300 (W 50 x H 70)	30 W
450 (W 50 x H 70)	45 W
600 (W 50 x H 70)	60 W
750 (W 50 x H 70)	75 W
900 (W 50 x H 70)	90 W
1200 (W 50 x H 70)	120 W
1500 (W 50 x H 70)	150 W

ARCHITECTURAL LIGHT

TRINO (DRUM)

Size Dia (mm)	Wattage
300 (H 75)	30 W
450 (H 75)	36 W
600 (H 50)	40 W
750 (H 50)	50 W
900 (H 50)	80 W
1200 (H 50)	120 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Mounting	: Suspended & Surface



LOUVERS



Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Mounting	: Suspended & Surface

Size Dia (mm)	Wattage
300 (W 50 x H 70)	30 W
450 (W 50 x H 70)	45 W
600 (W 50 x H 70)	60 W
750 (W 50 x H 70)	75 W
900 (W 50 x H 70)	90 W
1200 (W 50 x H 70)	120 W
1500 (W 50 x H 70)	150 W

LOUVERS (DRUM)

Size Dia (mm)	Wattage
300 (H 75)	30 W
450 (H 75)	45 W
600 (H 75)	60 W
750 (H 75)	75 W
900 (H 75)	90 W
1200 (H 75)	120 W
1500 (H 75)	150 W

Specifications

Material	: Aluminium & Acrylic
LED Color	: 3000 K / 4000 K / 6000 K
Body Color	: Black / White / Grey
Mounting	: Suspended & Surface



ULRL-01

Specifications

LED Rope Light	: 2835 - 120 LED
Dimension	: 11 x 6 mm
PCB	: 8 mm
Length	: 50 mtr
Wattage	: 10W per mtr
Input Voltage	: AC 220-240 V
Lumen	: 750 LM per mtr
No. of LED	: 120 LED per mtr
Protection	: IP 65



LED STRIP LIGHT

ULSL-01

LED Strip	: 2835 - 120 LED
Color	: WH / WW / NW / Blue / Orange
No. of LED	: 120 LED per Mtr.
PCB Width	: 8 mm
Length	: 5 Mtr.



ULSL-02

LED Strip	: 2835 - 180 LED
Color	: WH / WW / NW
No. of LED	: 180 LED per Mtr.
PCB Width	: 10 mm
Length	: 5 Mtr.

ULSL-03

LED Strip	: 2835 - 240 LED
Color	: WH / WW / NW / Blue / Orange
No. of LED	: 240 LED per Mtr.
PCB Width	: 10 mm
Length	: 5 Mtr.



ULSL-04

LED Strip	: 2835 - 180 LED 3 in 1
Color	: 3 in 1 (WH, WW, NW)
No. of LED	: 180 LED per Mtr.
PCB Width	: 10 mm
Length	: 5 Mtr.

ULSL-05

LED Strip	: 2835 - 120 LED 5 mm
Color	: WH / WW / NW
No. of LED	: 120 LED per Mtr.
PCB Width	: 5 mm
Length	: 5 Mtr.



ULSL-06

LED Strip	: 2835 - 180 LED 5 mm
Color	: WH / WW / NW
No. of LED	: 180 LED per Mtr.
PCB Width	: 5 mm
Length	: 5 Mtr.

PROFILE LIGHT HOUSING

S. No.	Item Code	Size	LED Strip	Body	Length
1.	UPLH-5mm-Concealed	5 mm x 9 mm	5 mm	Aluminium	2 mtr.
2.	UPLH-5mm-Surface	5 mm x 9 mm	5 mm	Aluminium	2 mtr.
3.	UPLH-10mm-Concealed	10 mm x 9 mm	10 mm	Aluminium	2 mtr.
4.	UPLH-10mm-Surface	10 mm x 9 mm	10 mm	Aluminium	2 mtr.
5.	UPLH-14mm-Concealed	14 mm x 9 mm	10 mm	Aluminium	2 mtr.
6.	UPLH-14mm-Surface	14 mm x 9 mm	10 mm	Aluminium	2 mtr.
7.	UPLH-17mm-Concealed	17 mm x 9 mm	10 mm	Aluminium	2 mtr.
8.	UPLH-17mm-Surface	17 mm x 9 mm	10 mm	Aluminium	2 mtr.
9.	UPLH-25mm-Concealed	25 mm x 10 mm	10 mm	Aluminium	2 mtr.
10.	UPLH-25mm-Surface	25 mm x 10 mm	10 mm	Aluminium	2 mtr.
11.	UPLH-35mm-Concealed	35 mm x 35 mm	10 mm	Aluminium	2 mtr.
12.	UPLH-35mm-Surface	35 mm x 35 mm	10 mm	Aluminium	2 mtr.
13.	UPLH-50mm-Concealed	50 mm x 35 mm	10 mm	Aluminium	2 mtr.
14.	UPLH-50mm-Surface	50 mm x 35 mm	10 mm	Aluminium	2 mtr.
15.	UPLH-75mm-Concealed	75 mm x 35 mm	10 mm	Aluminium	2 mtr.
16.	UPLH-75mm-Surface	75 mm x 35 mm	10 mm	Aluminium	2 mtr.
17.	UPLH-16mm-Corner	16 mm x 16 mm	10 mm	Aluminium	2 mtr.



TUBE LIGHT

TUBELIGHT - PC



Model No.	Wattage	Size	Color Temp.
UTL-01-05	5 W	1 Feet	3K / 4K / 6K
UTL-01-10	10 W	2 Feet	3K / 4K / 6K
UTL-01-20	20 W	4 Feet	3K / 4K / 6K
UTL-01-22	22 W	4 Feet	3K / 4K / 6K

LED tubelight housing made of engineering plastic with high efficient LEDs & Opal diffuser, IP20

TUBELIGHT - Aluminium

Model No.	Wattage	Size	Color Temp.
UTL-02-20	20 W	4 Feet	3K / 4K / 6K
UTL-02-24	24 W	4 Feet	3K / 4K / 6K
UTL-02-36	36 W	4 Feet	3K / 4K / 6K



Aesthetically designed surface luminaries, duly powder coated housing made of Aluminium extrusion and opal diffuser, IP20



T-8 Retrofit Tubelight - Aluminium

Model No.	Wattage	Size	Color Temp.
UTL-03-20	20 W	4 Feet	3K / 4K / 6K
UTL-03-24	24 W	4 Feet	3K / 4K / 6K

LED tubelight housing made of aluminium extrusion with high efficient LEDs & Opal diffuser with both end input AC Connections, IP20

BULB

BULB

Model No.	Wattage	Holder	Color Temp.
ULBL-01-0.5	0.5 W	B22 / E27	R, Y, W, G, P, O, B
ULBL-02-03	3 W	B22 / E27	WH, WW
ULBL-03-05	5 W	B22 / E27	WH, WW
ULBL-04-09	9 W	B22 / E27	WH, WW
ULBL-05-15	15 W	B22 / E27	WH, WW
ULBL-06-20	20 W	B22 / E27	WH, WW
ULBL-07-30	30 W	B22 / E27	WH, WW
ULBL-08-40	40 W	B22 / E27	WH, WW
ULBL-09-50	50 W	B22 / E27	WH, WW



Inverter Bulb

Model No.	Wattage	Holder	Color Temp.
U-ACDC-9	9 W	B22	WH
U-ACDC-12	12 W	B22	WH



OUTDOOR LIGHTING

OPTIMA STREET LIGHT

Item Code	Input Power	System Lumen
USL-01-20	20 Watts	2400
USL-01-25	25 Watts	3000
USL-01-30	30 Watts	3600
USL-01-36	36 Watts	4320
USL-01-40	40 Watts	4800
USL-01-50	50 Watts	6000
USL-01-60	60 Watts	7200
USL-01-72	72 Watts	8640
USL-01-90	90 Watts	10800
USL-01-100	100 Watts	12000
USL-01-120	120 Watts	14400
USL-01-150	150 Watts	18000
USL-01-180	180 Watts	21600
USL-01-200	200 Watts	24000
USL-01-250	250 Watts	30000

BIS APPROVED



Available Options on Demand

DC option for Solor

ON/OFF with astronomical timer and dimming

LDR based ON/FF & Dimming

Surge Protection upto 10 KV / 20 KV

Advanced Surge Protection with Upper and Lower Voltage Cutoff & recovery and phase to phase Protection

Analog (1-10V) / PWM / Resistive dimming / Dali

Specifications

Input Voltage	: 170 V - 270 V AC
Mounting	: Pole
Housing	: Dia Cast Aluminium
Frequency	: 50/60 Hz
Power Factor	: > 0.95
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP66
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Burning Life	: 50,000 Hours
Body Color	: Grey
Cover	: Toughened Glass
Matrix of High Power SMD LED's	
Inbuilt Electronic Driver with upto 4 KVA Surge Protection	

AERO STREET LIGHT



Item Code	Input Power	System Lumen
USL-02-24	24 Watts	2400
USL-02-30	30 Watts	3000
USL-02-36	36 Watts	3600
USL-02-50	50 Watts	5000
USL-01-60	60 Watts	6000
USL-02-70	70 Watts	7000
USL-02-100	100 Watts	10000
USL-01-120	120 Watts	12000
USL-02-150	150 Watts	15000
USL-02-200	200 Watts	20000

BIS APPROVED



Specifications

Input Voltage	: 170 V - 270 V AC
Power Factor	: > 0.95
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Frequency	: 50 / 60 Hz
Lumen Efficacy	: > 100 Lumens per Watt
Operating Temperature	: -20°C to 50°C
Ingress Protection	: IP66
Housing	: Die Cast Aluminium
Mounting	: Pole
Body Color	: Grey
Burning Life	: 50,000 Hours
Inbuilt Electronic Driver with upto 4 KVA Surge Protection	
High Efficiency PMMA/ PC Lens for excellent light distribution.	

NOVA STREET LIGHT

Item Code	Input Power	System Lumen
USL-03-50	50 Watts	6000
USL-03-100	100 Watts	12000
USL-03-200	200 Watts	24000



Available Options on Demand

ON/OFF with astronomical timer and dimming

LDR based ON/FF & Dimming

Surge Protection upto 10 KV / 20 KV

Advanced Surge Protection with Upper and Lower Voltage Cutoff & recovery and phase to phase Protection

Specifications

Input Voltage	: 170 V - 270 V AC
Mounting	: Pole
Housing	: Dia Cast Aluminium
Frequency	: 50/60 Hz
Power Factor	: > 0.95
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP66
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Burning Life	: 50,000 Hours
Body Color	: Grey
Cover	: Toughened Glass
Matrix of High Power SMD LED's	
Inbuilt Electronic Driver with upto 4 KVA Surge Protection	

SIGMA STREET LIGHT

(AC STREET LIGHT WITH BATTERY BACK-UP)

Item Code	Input Power
USL-04-25	25 Watts
USL-04-50	50 Watts



ADDED ADVANTAGES

Automatic ON/OFF

Surge Protection upto 10 KV / 20 KV

Advanced Surge Protection with Upper and Lower Voltage Cutoff & recovery and phase to phase Protection

Back-Up: 3hr.

Day Night Sensor

50% Dimming Using Motion Sensor

Specifications

Input Voltage	: 170 V - 270 V AC
Mounting	: Pole
Housing	: Dia Cast Aluminium
Frequency	: 50/60 Hz
Power Factor	: > 0.95
Ingress Protection	: IP66
Color Temperature	: 6000 K
Color Rendering Index	: > 70
Battery	: 12.8VA-12Ah Life P04
Body Color	: Grey
Inbuilt Electronic Driver with upto 4 KVA Surge Protection	

ELEGANT FLOOD LIGHT

Item Code	Input Power	System Lumen
UFL-01-30	30 Watts	3600
UFL-01-50	50 Watts	6000
UFL-01-60	60 Watts	7200
UFL-01-100	100 Watts	12000
UFL-01-120	120 Watts	14400
UFL-01-150	150 Watts	18000
UFL-01-180	180 Watts	21600
UFL-01-200	200 Watts	24000
UFL-01-250	250 Watts	30000
UFL-01-300	300 Watts	36000
UFL-01-400	400 Watts	48000
UFL-01-500	500 Watts	60000
UFL-01-1000	1000 Watts	120000

BIS APPROVED

Available Options on Demand

Higher Lumen upto 150 per Watt will be available on demand.

Surge Protection upto 10 KV / 20 KV

Advanced Surge Protection with Upper and Lower Voltage Cutoff & recovery and phase to phase Protection



Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.95
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP 66
Burning Life	: 50,000 Hours
Mounting	: Surface, Suspended
Housing	: Pressure Die Cast Aluminium
Body Color	: Grey
Cover	: Toughened Glass
Beam Angle	: Customized as per requirement
Inbuilt electronic Driver with 4KVA Surge Protection	

PRISM FLOOD LIGHT



Item Code	Input Power	System Lumen
UFL-02-30	30 Watts	3600
UFL-02-50	50 Watts	6000
UFL-02-60	60 Watts	7200
UFL-02-100	100 Watts	12000
UFL-02-120	120 Watts	14400
UFL-02-150	150 Watts	18000
UFL-02-180	180 Watts	21600
UFL-02-200	200 Watts	24000
UFL-02-250	250 Watts	30000
UFL-02-300	300 Watts	36000
UFL-02-400	400 Watts	48000

BIS APPROVED

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.95
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP 66
Burning Life	: 50,000 Hours
Mounting	: Surface, Suspended
Housing	: Pressure Die Cast Aluminium
Body Color	: Grey
Cover	: Toughened Glass
Beam Angle	: Customized as per requirement
Inbuilt electronic Driver with 4KVA Surge Protection	


DELTA FLOOD LIGHT (RGB)



Item Code	Input Power
UFL-03-50	50 Watts
UFL-03-100	100Watts
UFL-03-150	150 Watts
UFL-03-180	180 Watts
UFL-03-200	200 Watts
UFL-03-250	250 Watts

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.95
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 100 Lumen per Watt
Ingress Protection	: IP 66
Burning Life	: 50,000 Hours
Mounting	: Surface, Suspended
Housing	: Pressure Die Cast Aluminium
Body Color	: Grey
Cover	: Toughened Glass
Beam Angle	: Customized as per requirement
Inbuilt electronic Driver with 4KVA Surge Protection	

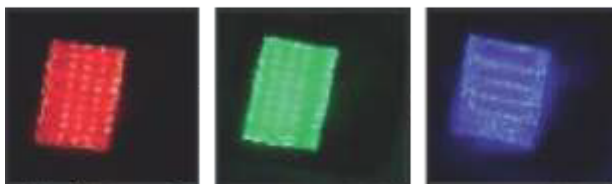

Solar Street Light-All in One

- Micro Controller based design
- High efficiency LED
- Aluminum Housing
- Full Night Backup
- Mono Panel
- MPPT Driver
- Smart Dimming Through Motion Sensor



Product Code	LED Wattage	PV Module	Battery	Lum.Flux	Dimension(MM)
UNCR-AIO-15	15 wt	30 wt	12.8V 12Ah LiFePO4	2250 lumen	440 x 420 x 60
UNCR-AIO-18	18 wt	40 wt	12.8V 12Ah LiFePO4	2700 lumen	585 x 420 x 60
UNCR-AIO-24	24 wt	50 wt	12.8V 18Ah LiFePO4	3600 lumen	715 x 420 x 60
UNCR-AIO-30	30 wt	60 wt	12.8V 18Ah LiFePO4	4500 lumen	810 x 420 x 60
UNCR-AIO-40	40 wt	80 wt	12.8V 24Ah LiFePO4	6000 lumen	1050 x 420 x 60
UNCR-AIO-50	50 wt	100 wt	12.8V 30Ah LiFePO4	7500 lumen	1350 x 420 x 60
UNCR-AIO-60	60 wt	120 wt	12.8V 42Ah LiFePO4	9000 lumen	1040 x 600 x 60
UNCR-AIO-80	80 wt	150 wt	25.6V 30Ah LiFePO4	12000 lumen	1300 x 600 x 60
UNCR-AIO-100	100 wt	180 wt	25.6V 36Ah LiFePO4	15000 lumen	1200 x 785 x 60
UNCR-AIO-120	120 wt	180 wt	25.6V 42Ah LiFePO4	18000 lumen	1200 x 785 x 60
UNCR-AIO-150	150 wt	225 wt	25.6V 54Ah LiFePO4	22500 lumen	1445 x 785 x 60

Solar Street Light- Semi Integrated

- Micro Controller based design
- High efficiency LED
- Aluminum Housing
- Full Night Backup
- Mono Panel
- MPPT Driver
- Smart Dimming Through Motion Sensor



Product Code	LED Wattage	PV Module	Battery	Lum.Flux	Dimension(MM)
UNCR-SEM-INT-10	10 wt	30 wt	12.8V 6Ah LiFePO4	1400 lumen	360 x 140 x 105
UNCR-SEM-INT-12	12 wt	40 wt	12.8V 12Ah LiFePO4	1680 lumen	360 x 140 x 105
UNCR-SEM-INT-15	15 wt	50 wt	12.8V 12Ah LiFePO4	2100 lumen	360 x 140 x 105
UNCR-SEM-INT-18	18 wt	60 wt	12.8V 18Ah LiFePO4	2520 lumen	360 x 140 x 105
UNCR-SEM-INT-24	24 wt	80 wt	12.8V 18Ah LiFePO4	3360 lumen	360 x 140 x 105
UNCR-SEM-INT-30	30 wt	100 wt	12.8V 24Ah LiFePO4	4200 lumen	430 x 170 x 120
UNCR-SEM-INT-36	36 wt	120 wt	12.8V 30Ah LiFePO4	5040 lumen	430 x 170 x 120
UNCR-SEM-INT-40	40 wt	120 wt	12.8V 36Ah LiFePO4	5600 lumen	430 x 170 x 120
UNCR-SEM-INT-45	45 wt	160 wt	25.6V 42Ah LiFePO4	6300 lumen	430 x 170 x 200
UNCR-SEM-INT-50	50 wt	160 wt	25.6V 48Ah LiFePO4	7000 lumen	430 x 170 x 200
UNCR-SEM-INT-60	60 wt	160 wt	25.6V 60Ah LiFePO4	8400 lumen	430 x 170 x 200

Solar Flood Light

Solar High Mast Lighting system is a self sufficient, off- grid solution for illuminating large outdoor areas. It uses solar panels to power high intensity LED lights, saving on energy costs and eliminating the need for grid connection. The system includes a pole, solar panels, a battery and smart controls.

KEY FEATURES:

SOLAR PANELS: High efficiency panels to capture sunlight

LED LIGHTS: Powerful, energy efficient lights for broad, even illumination

BATTERY: A long lasting LiFePO4 battery with a built in management system for protection.

SMART CONTROLS: Automated dusk to dawn operation with options for motion sensors, programmable schedules, Blue tooth and remote monitoring.

APPLICATIONS:

Highways, Airports, Parking lots, Sports Complexes and remote locations without access to a power grid.



SOLAR POWER PLANT

PRODUCT DESCRIPTION :

Product Name : UNICOR SOLAR POWER PLANT

Usage / Application : Residential, Commercial, Industrial

Type of Plant : Grid Tie

Capacity : 1 KW - 500 KW

OUTDOOR WALL LIGHT

UOWL-001



Model No.	Wattage	Dimension (MM)
UOWL-001-3	3 W	L 67 x H 62
UOWL-001-6	2 x 6 W	L 67 x H 118


Specifications

Lighting Source	: CREE / BRIDGELUX
Ingress Protection	: IP65
CCT	: 3000K
Luminous Flux	: 140 LM/ W
Voltage	: AC100-240V 50/60 Hz
Material	: Aluminium Die Casting
Life Span	: 25000 Burning Hours



UOWL-002

Model No.	Wattage	Dimension (MM)
UOWL-002-1	1 W	L 50 x H 130
UOWL-002-2	2 W	L 50 x H 130

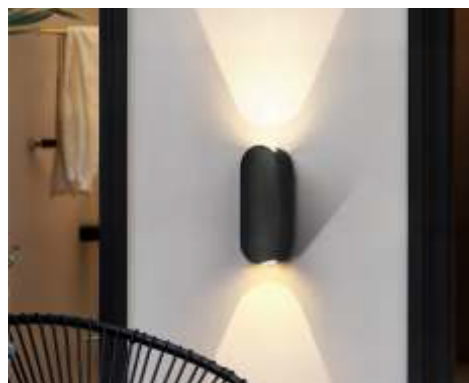

Specifications

Lighting Source	: OSRAM / SEOUL
CCT	: 3000K
Luminous Flux	: 140 LM/ W
Voltage	: AC100-240V 50/60 Hz
Material	: Aluminium Die Casting
Life Span	: 25000 Burning Hours
Ingress Protection	: IP65

OUTDOOR WALL LIGHT


UOWL-003

Model No.	Wattage
UOWL-003-2	2 x 1W
UOWL-003-4	4 x 1W
UOWL-003-8	8 x 1W



Specifications

Lighting Source	: OSRAM / SEOUL
CCT	: 3000K
Luminous Flux	: 140 LM/ W
Voltage	: AC100-240V 50/60 Hz
Material	: Aluminium Die Casting
Life Span	: 25000 Burning Hours
Ingress Protection	: IP65

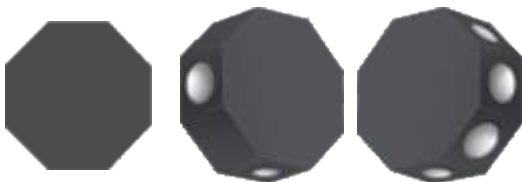

UOWL-004

Model No.	Wattage	Dimension (MM)
UOWL-004-1	1 W	40 X 40
UOWL-004-2	2 W	40 X 40

Specifications

Lighting Source	: Bridgelux LED
CCT	: 3000K / 4000K / 6000K
Luminous Flux	: 140 LM/ W
Voltage	: AC100-240V 50/60 Hz
Material	: Aluminium Die Casting
Ingress Protection	: IP65



OUTDOOR WALL LIGHT

UOWL-005



Model No.	Wattage	Dimension (MM)
UOWL-005-7	7 W	150 mm x 150 mm
UOWL-005-12	12 W	225 mm x 225 mm

Specifications

Mounting	: Wall & Base Mounting
Ingress Protection	: IP65
CCT	: 3000K
Body Cover	: Grey
Material	: Aluminium Die Casting

UOWL-006

Model No.	Wattage	Dimension (MM)
UOWL-006-7	7 W	33mm x 117 mm
UOWL-006-12	12 W	37mm x 136 mm

Specifications

Mounting	: Wall & Base Mounting
Ingress Protection	: IP65
CCT	: 3000K
Body Cover	: Grey
Material	: Aluminium Die Casting



UOWL-007

Model No.	Wattage	Dimension (MM)
UOWL-007-7	9 W	35mm x 130 mm
UOWL-007-12	12 W	35mm x 140 mm

Specifications

Mounting	: Wall & Base Mounting
Ingress Protection	: IP65
CCT	: 3000K
Body Cover	: Grey
Material	: Aluminium Die Casting




OUTDOOR WALL LIGHT

UOWL-008

Model No.	Wattage	Dimension (MM)
UOWL-008-5	5 W	L 75 x W 80 x H 68 mm
UOWL-008-10	10 W	L 142 x W 80 x H 68 mm

Specifications

Lighting Source	: CREE / BRIDGELUX
Ingress Protection	: IP65
CCT	: 3000 K
Luminous Flux	: 140 LM / W
Voltage	: AC 100 - 240 V 50/60 Hz
Material	: Aluminium Die Casting




UOWL-009

Model No.	Wattage	Dimension (MM)
UOWL-009-12	12 W	95 x 65 x 50
UOWL-009-18	18 W	115 x 130 x 55
UOWL-009-24	24 W	150 x 130 x 70
UOWL-009-30	30 W	200 x 130 x 70

Specifications

Lighting Source	: CREE / BRIDGELUX
Ingress Protection	: IP65
CCT	: 3000 K
Luminous Flux	: 140 LM / W
Voltage	: AC 100 - 240 V 50/60 Hz
Material	: Aluminium Die Casting

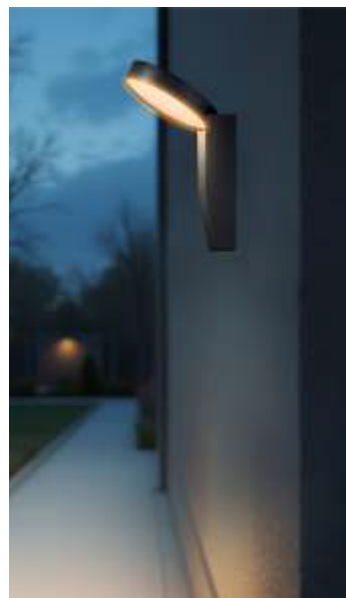

UOWL-010

Model No.	Wattage	Dimension (MM)
UOWL-010	7 W	L 76 x W 80 x H 38 mm

Specifications

Lighting Source	: CREE / BRIDGELUX
Ingress Protection	: IP65
CCT	: 3000 K
Luminous Flux	: 140 LM / W
Voltage	: AC 100 - 240 V 50/60 Hz
Material	: Aluminium Die Casting



HERITAGE WALL LIGHT

UHWL01-A

Mounting	: Wall Mount
Body Color	: Antique Gold/Green/Black
Material	: Cast Aluminium
Size	: 300 mm x 200 mm
Holder	: B22

UHWL01-B

Mounting	: Wall Mount
Body Color	: Antique Gold/Green/Black
Material	: Cast Aluminium
Size	: 425 mm x 260 mm
Holder	: B22



UHWL-02



Mounting	: Wall Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 425mm x 250mm
Holder	: B22

UHWL03-A

Mounting	: Wall Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 320 mm x 210 mm
Holder	: B22

UHWL03-B

Mounting	: Wall Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 370 mm x 260 mm
Holder	: B22



UHWL04-A

Mounting	: Wall Mount
Body Color	: Black, Anti Gold, Green
Material	: Cast Aluminium
Size	: 330 mm x 220 mm
Holder	: B22

UHWL04-B

Mounting	: Wall Mount
Body Color	: Black, Anti Gold / Green
Material	: Cast Aluminium
Size	: 450 mm x 280 mm
Holder	: B22



HERITAGE WALL LIGHT



UHWL05-A

Mounting	: Wall Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 350 mm x 225 mm
Holder	: B22

UHWL05-B

Mounting	: Wall Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 500 mm x 275 mm
Holder	: B22

UHWL-06

Mounting	: Wall Mount
Body Color	: Antique Gold / Black
Material	: Cast Aluminium
Size	: 350mm x 300mm
Holder	: B22



GATE LIGHT



UGL 01

Pipe Dia	: Ø 55mm
Body Color	: Black, Antique Gold / Green
Material	: Cast Aluminium
Size	: 425mm x 200mm
Holder	: B22

UGL 02-A

Pipe Dia	: Ø 55mm
Body Color	: Antique Gold/ Green, Black
Material	: Cast Aluminium
Size	: 300mm x 150mm
Holder	: B22

UGL 02-B

Pipe Dia	: Ø 70mm
Body Color	: Antique Gold/ Green, Black
Material	: Cast Aluminium
Size	: 425mm x 225mm
Holder	: B22



UGL 03-A

Pipe Dia	: Ø 55mm
Body Color	: Black, Antique Gold/ Green
Material	: Cast Aluminium
Size	: 320mm x 170mm
Holder	: B22

UGL 03-B

Pipe Dia	: Ø 60mm
Body Color	: Black, Antique Gold/ Green
Material	: Cast Aluminium
Size	: 425mm x 225mm
Holder	: B22

Size available on demand : 600 mm x 250 mm, 700 mm x 300

UGL 04-A

Mount	: Base Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 350mm x 190mm
Holder	: B 22

UGL 04-B

Mount	: Base Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 450 mm x 260mm
Holder	: B 22

Size available on demand : 600 mm x 250 mm, 700 mm x 300



GATE LIGHT

UGL 05-A

Pipe Dia	: Ø 60mm
Body Color	: Black, Anti Gold/Green
Material	: Cast Aluminium
Size	: 350 mm x 200 mm
Holder	: B 22

UGL 05-B

Pipe Dia	: Ø 70mm
Body Color	: Black, Ant. Gold / Green
Material	: Cast Aluminium
Size	: 500mm x 250mm
Holder	: B 22



Size Available on Demand : 750 mm x 350 mm



UGL 06

Mounting	: Base Mount
Body Color	: Black, Ant. Gold / Green
Material	: Cast Aluminium
Size	: 350mm x 175mm
Wattage	: B-22

Size available on demand : 500 mm x 225 mm

UGL 07-A

Mounting	: Base Mount
Body Color	: Grey
Material	: Cast Aluminium
Size	: 150mm x 160mm
Holder	: B22

UGL 07-B

Mounting	: Base Mount
Body Color	: Grey
Material	: Cast Aluminium
Size	: 252mm x 265mm
Holder	: B22



UGL 08

Mounting	: Base Mount
Body Color	: Grey
Material	: Cast Aluminium
Size	: 467 mm x 440 mm
Wattage	: 50 Watt

GATE LIGHT



UGL 09

Mounting	: Base Mount
Body Color	: Grey
Material	: Cast Aluminium
Size	: 250mm x 250mm
Wattage	: 12 Watt

UGL 10

Mounting	: Base Mount
Body Color	: Grey
Material	: Cast Aluminium
Size	: 150mm x 213mm
Wattage	: 12 Watt



UGL 11

Mounting	: Base Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 250mm x 250mm
Wattage	: 9 Watt

UGL 12


Mounting	: Base Mount
Body Color	: Black
Material	: Cast Aluminium
Size	: 250mm x 250mm
Wattage	: 9 Watt



FOOT LIGHT

UFL 01

LED Color	: WW
Body Color	: White / Black
Wattage	: 3 W




UFL 02

LED Color	: WW
Body Color	: White / Black
Wattage	: 5 W

UFL 03

LED Color	: WW
Body Color	: Grey / Black
Wattage	: 8 W



UFL 04

LED Color	: WW
Body Color	: Grey / Black
Wattage	: 4 W



UFL 05

LED Color	: WW
Body Color	: Grey / Black
Wattage	: 8 W



SPIKE LIGHT

Model No.	Wattage	Dimension (MM)
UOL-26-3	3 W	L 60 x 60
UOL-26-6	6 W	L 80 x 60
UOL-26-12	12 W	L 90 x 60
UOL-26-12B	12 W	L 70 x 45



Specifications

Lighting Source	: OSRAM / SEOUL
CCT	: 3000K
Luminous Flux	: 140 LM/ W
Voltage	: AC100-240V 50/60 Hz
Material	: Aluminium Die Casting
Life Span	: 25000 Burning Hours
Ingress Protection	: IP65

Model No.	Wattage	Dimension (MM)
UOL-027-A	5 W	L 70 x 45
UOL-027-B	12 W	L 100 x 65



INGROUND BURIAL LIGHT

UIBL-01

Model No.	Wattage	Material	CCT
UIBL-01-A	1 W x 3	Aluminium Die Cast	3000 K
UIBL-01-B	3 W x 3	Aluminium Die Cast	3000 K

Ingress Protection : IP65



UIBL-02

Model No.	Wattage	Material	CCT
UIBL-02-A	1 W x 6	Aluminium Die Cast	3000 K
UIBL-02-B	3 W x 6	Aluminium Die Cast	3000 K

Ingress Protection : IP65



UIBL-03

Model No.	Wattage	Material	CCT
UIBL-03-A	1 W x 9	Aluminium Die Cast	3000 K
UIBL-03-B	3 W x 9	Aluminium Die Cast	3000 K

Ingress Protection : IP65



UIBL-04

Model No.	Wattage	Material	CCT
UIBL-04-A	1 W x 12	Aluminium Die Cast	3000 K
UIBL-04-B	3 W x 12	Aluminium Die Cast	3000 K

Ingress Protection : IP65



UNDERWATER LIGHT



IP68

UUWL-01-A, UUWL-01-B

Light Source	: Edison LED
Power	: A-3 x 1 W, B - 3 x 3 W
Luminous Flux	: 140 Lm/W
Voltage	: 12V DC
Material	: Aluminium Die Casting
Life Span	: 25000 H
LED Colour	: WW, WH, R, G, B, RGB

UUWL-02-A, UUWL-02-B

Light Source	: Edison LED
Power	: A-6 x 1 W, B - 6 x 3 W
Luminous Flux	: 140 Lm/W
Voltage	: 12V DC
Material	: Aluminium Die Casting
Life Span	: 25000 H
LED Colour	: WW, WH, R, G, B, RGB

IP68



IP68

UUWL-03-A, UUWL-03-B

Light Source	: Edison LED
Power	: A-9 x 1 W, B - 9 x 3 W
Luminous Flux	: 140 Lm/W
Voltage	: 12V DC
Material	: Aluminium Die Casting
Life Span	: 25000 H
LED Colour	: WW, WH, R, G, B, RGB

UUWL-04-A, UUWL-04-B

Light Source	: Edison LED
Power	: A-12 x 1 W, B - 12 x 3 W
Luminous Flux	: 140 Lm/W
Voltage	: 12V DC
Material	: Aluminium Die Casting
Life Span	: 25000 H
LED Colour	: WW, WH, R, G, B, RGB

IP68





ULTRA SLIM POWER SUPPLY


Specifications

Operating Voltage	: 12V
Input Range	: 140-265V 50Hz

Power	Wattage	Dimension (MM)
2 Amp	24 W	
3 Amp	36 W	100 x 30 x 20
5 Amp	60 W	170 x 53 x 22
10 Amp	120 W	226 x 53 x 22
12.5 Amp	150 W	250 x 53 x 22
16.5 Amp	200 W	282 x 53 x 22
25 Amp	300 W	308 x 53 x 22
33 Amp	400W	308 x 53 x 22

OUTDOOR DRIVER

S.No.	Model No.	Wattage	O/P DC Voltage	O/P DC Current	Surge
1.	UOD/01/18-24W	18-24 W	60-80 V	300 mA	4 KV
2.	UOD/02/18-24W	18-24 W	30-40 V	600 mA	4 KV
3.	UOD/03/30-36W	30-36 W	40-60 V	600 mA	4-6 KV
4.	UOD/04/30-36W	30-36 W	32-48 V	750 mA	4-6 KV
5.	UOD/05/30-36W	30-36 W	20-40 V	900 mA	4-6 KV
6.	UOD/06/30-50W	50 W	60-80 V	600 mA	5-6 KV
7.	UOD/07/30-50W	50 W	50-70 V	750 mA	5-6 KV
8.	UOD/08/30-50W	50 W	60-60 V	850-900 mA	5-6 KV
9.	UOD/09/30-50W	50 W	32-44 V	1200 mA	5-6 KV
10.	UOD/10/30-50W	50 W	21-36 V	1500 mA	5-6 KV
11.	UOD/11/40-60W	50-60 W	50-80 V	750 mA	5-6 KV
12.	UOD/12/40-60W	50-60 W	28-38 V	1500 mA	5-6 KV

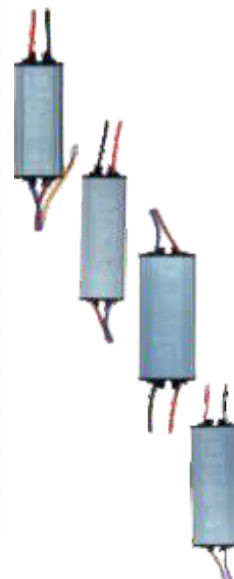

Specifications

Power Factor	: > 0.9
I/P Voltage	: 90-300 VAC
OVP	: 310 VAC
UVP	: 80 VAC
440 VC Sustain	: Yes

OUTDOOR DRIVER - IP65

Application : Flood Light / Street Light / Highbay Light

SPD

SURGE PROTECTION DEVICE (SPD)

USPD-01

TECHNICAL SPECIFICATION

Wires	: Input and output 20 cm
Input Voltage	: AC 100 - 380 V
Maximum Continuous Operating Voltage	: 440 V
Maximum Input Wattage	: 500 W
Maximum Output Wattage	: 500 W
Maximum Discharge Current	: 5 KV
Maximum Discharge Voltage	: 10 KV
Casing Protection Grade	: IP 65
SPD Connection type with Lead	: Series, No distinction of input & output
Operating Temperature Range	: -30 deg C to + 80 deg C

Application : Flood Light / Street Light / Highbay Light





LANDSCAPE LIGHTING

BOLLARD LIGHT

UBL-001




Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-001-A	9 W	Ø88	300
UBL-001-B	9 W	Ø88	600
UBL-001-C	9 W	Ø88	900

Material : Aluminium, CCT : 3000K / 6000K
Wall Light & Gate Light Available

UBL-002

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-002-A	14 W	150 x 300	300
UBL-002-B	14 W	150 x 300	600

Material : Aluminium, CCT : 3000K



UBL-003



Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-003-A	10 W	Ø150	300
UBL-003-B	12 W	Ø150	600
UBL-003-C	15 W	Ø150	900

Material : Aluminium, CCT : 3000K

UBL-004

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-004-A	E -27	100 x 100	200
UBL-004-B	E -27	100 x 100	600
UBL-004-C	12 W	100 x 100	600

Material : Aluminium, CCT : 3000K
Wall Light Available



BOLLARD LIGHT

UBL-005

Model No.	Wattage	Size (mm)
UBL-005-A	10 W	300
UBL-005-B	12 W	600
UBL-005-C	15 W	900

Material : Aluminium, CCT : 3000K



UBL-006

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-006-A	12 W	150 x 150	350
UBL-006-B	24 W	150 x 150	650

Material : Aluminium, CCT : 3000K

UBL-007

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-007-A	7 W	Ø 175	213
UBL-007-B	7 W	Ø 175	600

Material : Aluminium, CCT : 3000K

Gate Light Available



UBL-008

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-008-A	E -27	175 x 175	380
UBL-008-B	E -27	175 x 175	685
UBL-008-C	E -27	175 x 175	900

Material : Aluminium, CCT : 3000K

Gate Light Available

UBL-009

BOLLARD LIGHT



Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-009-A	12 W	Ø 160	300
UBL-009-B	12 W	Ø 160	600
UBL-009-C	12 W	Ø 160	900
UBL-009-D	12 W	Ø 160	1200

Material : Aluminium, CCT : 3000K

UBL-010

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-010-A	12 W	125 x 500	500
UBL-010-B	12 W	125 x 800	800

Material : Aluminium, CCT : 3000K / 6000K



UBL-011

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-011-A	12 W	150 x 225	225
UBL-011-B	12 W	150 x 600	600


Material : Aluminium, CCT : 3000K
Gate Light Available



UBL-012

Model No.	Wattage	Size (mm)
UBL-012-A	10 W	240
UBL-012-B	15 W	600

Material : Aluminium, CCT : 3000K
Gate Light Available



BOLLARD LIGHT

UBL-013

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-013-A	12 W	140 x 140	300
UBL-013-B	12 W	140 x 140	600

Material : Aluminium, CCT : 3000K / 6000K



UBL-014

Model No.	Wattage	Size (mm)
UBL-014-A	10 W	600
UBL-014-B	15 W	900


Material : Aluminium, CCT : 3000K

UBL-015

Model No.	Wattage	Size (mm)
UBL-015-A	12 W	300
UBL-015-B	15 W	600
UBL-015-C	18 W	900

Material : Aluminium, CCT : 3000K

Available in wooden finish also




UBL-016

Model No.	Wattage	Size (mm)
UBL-016-A	9 W	600
UBL-016-B	9 W	600

Material : Aluminium, CCT : 3000K

BOLLARD LIGHT

UBL-017



Model No.	Wattage	Size (mm)
UBL-017-A	15 W	600/ as per req.
UBL-017-B	15 W	600/ as per req.
UBL-017-C	24 W	600/ as per req.

Material : Aluminium, CCT : 3000K

UBL-018

Model No.	Wattage	Size (mm)
UBL-018-A	12 W	600

Material : Aluminium , CCT : 3000K



UBL-019



Model No.	Wattage	Size (mm)
UBL-019-A	12 W	375
UBL-019-B	12 W	375
UBL-019-C	12 W	375

Material : Aluminium, CCT : 3000K

UBL-020

Model No.	Wattage	Size (mm)
UBL-020-A	12 W	600
UBL-020-B	12 W	900
UBL-020-C	12 W	1200

Material : Aluminium, CCT : 3000K
Available in Square Shape also



BOLLARD LIGHT

UBL-021

Model No.A	Model No.B	Wattage	Size (mm)
UBL-021-A	UBL-021-B	30 W	600
UBL-021-A1	UBL-021-B1	50 W	900
UBL-021-A2	UBL-021-B2	100 W	1200

Material : M.S/ Aluminium, CCT : 3000K / 6000K



UBL-022

Model No. A	Model No. B	Wattage	Size (mm)
UBL-022-A	UBL-022-B	10 W	600
UBL-022-A1	UBL-022-B1	15 W	900
UBL-022-A2	UBL-022-B2	10 W	600
UBL-022-A3	UBL-022-B3	15 W	900

Material : M.S/ Aluminium, CCT : 3000K



UBL-023

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-023-A	7 W	150 x 250	300
UBL-023-B	12 W	150 x 600	600


Material : Aluminium, CCT : 3000K
Gate Light Available




UBL-024

Model No.	Wattage	Size (mm)
UBL-024-A	6 W	250
UBL-024-B	10 W	600

Material : Aluminium, CCT : 3000K
Available in square shape also

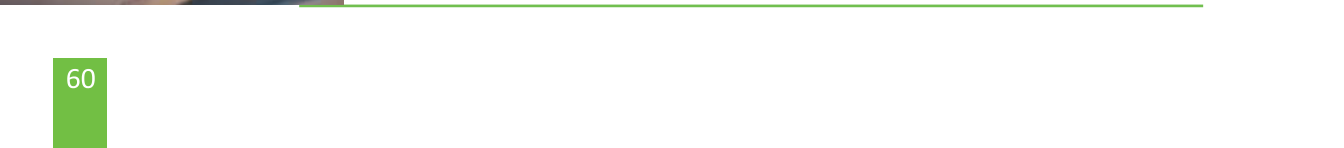

BOLLARD LIGHT



UBL-025

Model No.	Wattage	Size (mm)
UBL-025-A	15 W	600
UBL-025-B	30 W	600
UBL-025-C	15 W	900
UBL-025-D	30 W	900

Material : Cast Aluminium, CCT : 3000K

UBL-026

Model No.	Wattage	Size (mm)
UBL-026-A	15 W	600
UBL-026-B	30 W	600
UBL-026-C	15 W	900
UBL-026-D	30 W	900

Material : Cast Aluminium, CCT : 3000K



UBL-027

Model No.	Wattage	Dimension (mm)	Size (mm)
UBL-027	09 W	Ø150	650

Material : Cast Aluminium, CCT : 3000K / 6000K

UBL-028

Model No.	Wattage	Size (mm)
UBL-028	B 22	1150

Material : Cast Aluminium, CCT : 3000K / 6000K



BOLLARD LIGHT

UBL-029

Model No.	Wattage	Size (mm)
UBL-029-A	10 W	600
UBL-029-B	15 W	900
UBL-029-C	18 W	1200

Material : Aluminium, CCT : 3000K



UBL-030

Model No.	Wattage	Size (mm)
UBL-030	09 W	600

Material : Aluminium, CCT : 3000K

UBL-031

Model No.	Wattage	Size (mm)
UBL-031-A	10 W	600
UBL-031-B	15 W	900
UBL-031-C	18 W	1200

Material : Aluminium, CCT : 3000K



UBL-032

Model No. A	Model No. B	Wattage	Size (mm)
UBL-032-A	UBL-032-B	12 W	600
UBL-032-A1	UBL-032-B1	12 W	900
UBL-032-A2	UBL-032-B2	12 W	1200

Material : Aluminium, CCT : 3000K





UBL-033

BOLLARD LIGHT

Model No.	Wattage	Size (mm)
UBL-033-A	20 W	600
UBL-033-B	20 W	900
UBL-033-C	20 W	1200

Material : Cast Aluminium, CCT : 3000K
Design change as per requirement

UBL-034

Model No.	Wattage	Size (mm)
UBL-034-A	20 W	1800
UBL-034-B	36 W	3600

Material : Cast Aluminium, CCT : 3000K



UBL-035

Model No.	Wattage	Size (mm)
UBL-035-A	50 W	3000
UBL-035-B	100 W	4500


Material : Cast Aluminium, CCT : 3000K

UBL-036

Model No.	Wattage	Size (mm)
UBL-036-A	7 W	600/ as per req.
UBL-036-B	7 W	600/ as per req.

Material : Aluminium, CCT : 3000K



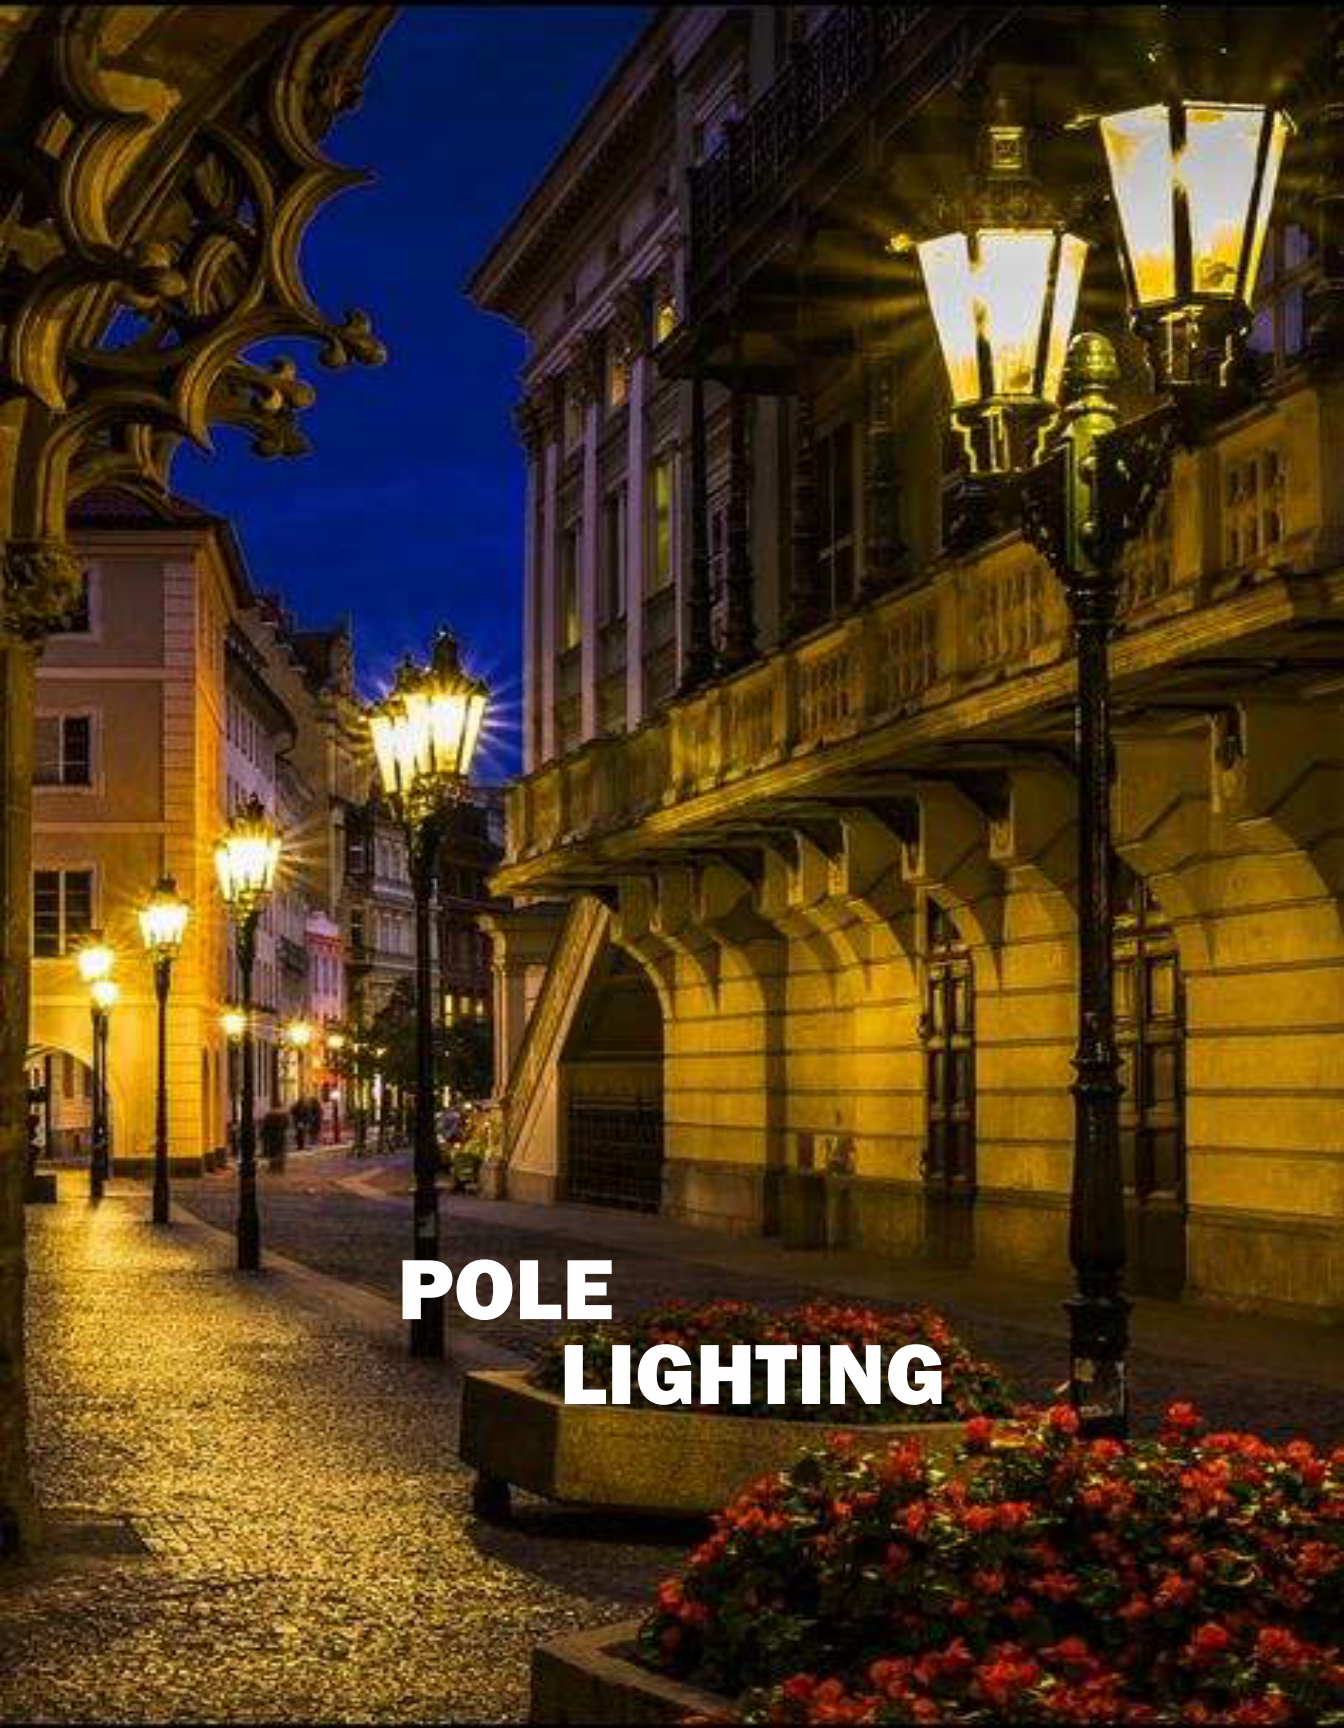

POLE LIGHTING

MODERN POLE LIGHT

UMPL-01

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-01-A	50 W	Ø 60	2400
UMPL-01-B	50 W	Ø 60	3000
UMPL-01-C	50 W	Ø 60	3600

Material : Mild Steel Pole, Cast Iron Embellishments,
Cast Alluminium Lighting Fixture, CCT : 3000K / 4000K / 6000K

UMPL-02

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-02-A	50 W	Ø 75	2400
UMPL-02-B	50 W	Ø 75	3000
UMPL-02-C	50 W	Ø 75	3600
UMPL-02-D	50 W	Ø 114 X 75	2400
UMPL-02-E	50 W	Ø 114 X 75	3000
UMPL-02-F	50 W	Ø 114 X 75	3600

Material : Mild Steel Pole, Cast Iron Embellishments,
Cast Alluminium Lighting Fixture, CCT : 3000K / 4000K / 6000K

UMPL-03

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-03-A	50 W x 1	Ø 114 x 60	as per requirement
UMPL-03-B	50 W x 1	Ø 114 x 60	as per requirement
UMPL-03-C	50 W x 2	Ø 114 x 60	as per requirement

Material : Mild Steel Pole, Cast Iron Embellishments,
Cast Alluminium Lighting Fixture, CCT : 3000K / 4000K / 6000K

MODERN POLE LIGHT



UMPL-04

Model No.	Wattage	Height (MM)
UMPL-04-A	50 W	AS per requirement
UMPL-04-B	50 X 2 W	AS per requirement

Material : Mild Steel Pole, Mild Steel Bracket Aluminium Lighting Fixtures, Polycarbonate diffuser, CCT : 3000K / 4000K / 6000K



UMPL-05

Model No.	Wattage	Height (MM)
UMPL-05-A	36 W	AS per requirement
UMPL-05-B	36 W	AS per requirement
UMPL-05-C	36 W	AS per requirement

Material : Mild Steel Pole, Mild Steel Bracket Aluminium Lighting Fixtures, Polycarbonate diffuser, CCT : 3000K / 4000K / 6000K



UMPL-06

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-06-A	36 W X 1	Ø 114 X 60	4000
UMPL-06-B	36 W X 2	Ø 114 X 60	4000
UMPL-06-C	36 W X 2	Ø 114 X 60	4000

Material : M.S/G.I Pole, Mild Steel Bracket Aluminium Lighting Fixtures, Polycarbonate diffuser, CCT : 3000K / 4000K / 6000K



UMPL-07

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-07-A	50 W x 1	Ø 114 X 60	3000
UMPL-07-B	50 W x 2	Ø 114 X 60	3000
UMPL-07-C	50 W x 1	Ø 114 X 60	4000
UMPL-07-D	50 W x 2	Ø 114 X 60	4000

Material : Mild Steel Pole, Mild Steel Bracket Aluminium Lighting Fixtures, Polycarbonate diffuser, CCT : 3000K / 4000K / 6000K




MODERN POLE LIGHT



UMPL-08

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-08-A	50 x 2 W	100 x 100	2400/3000/3600
UMPL-08-B	50 x 2 W	100 x 100	2400/3000/3600
UMPL-08-C	50 x 1 W	100 x 100	2400/3000/3600


Material : G.I.Pole
CCT : 3000K / 4000K / 6000K

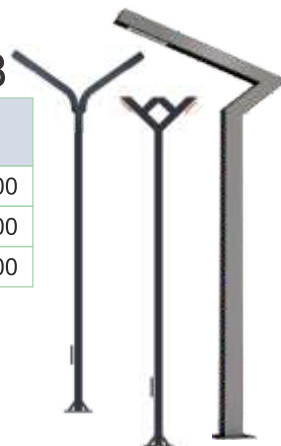

UMPL-09

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-09-A	50Wx 2	100 x 100	2400/3000/3600
UMPL-09-B	50W	100 x 100	2400/3000/3600
UMPL-09-C	50 x 1 W	100 x 100	As per requirement

Material : G.I.Pole
CCT : 3000K / 4000K / 6000K

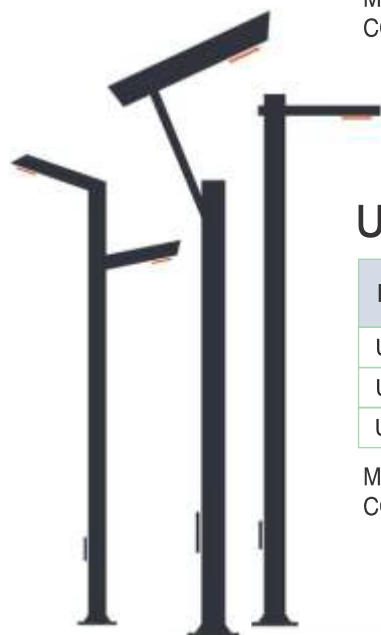

MODERN POLE LIGHT



UMPL-10

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-10-A	50 W	Ø60	2400, 3000, 3600
UMPL-10-B	50 W x 2	Ø60	2400, 3000, 3600
UMPL-10-C	50 W	Ø60	2400, 3000, 3600

Material : Mild Steel Pole, Extruded Aluminium Lighting Fixture
CCT : 3000K / 4000K / 6000K



UMPL-11

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-11-A	50 W x 1	Ø 60	2400, 3000, 3600
UMPL-11-B	50 W x 1	Ø 60	2400, 3000, 3600
UMPL-11-C	50 W x 3	Ø 60	2400, 3000, 3600

Material : Mild Steel Pole, Extruded Aluminium Lighting Fixture
CCT : 3000K / 4000K / 6000K

UMPL-12

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-12-A	24 W	Ø 100	4000
UMPL-12-B	50 W	Ø 100	3000, 4000, 5000
UMPL-12-C	50 W	Ø 100	3000, 4000, 5000

Material : Mild Steel Pole, Polycarbonate Diffuser Cast Aluminium Caps
CCT : 3000K / 4000K / 6000K



MODERN POLE LIGHT

UMPL-13

Model No.	Wattage	Height (MM)
UMPL-13-A	30 W, 50 W	3000
UMPL-13-B	30 W, 50 W	3600

Material : M.S/Aluminium Powder Coated & Acrylic,
CCT : 3000K / 4000K / 6000K



UMPL-14

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-14-A	24 W	150 x 100	1800
UMPL-14-B	36 W	150 x 100	2400
UMPL-14-C	50 W	150 x 100	3000

Material : Aluminium, CCT : 3000K / 4000K / 6000K



UMPL-15

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-15-A	24 W	100 x 100	1800, 2400, 3000
UMPL-15-B	50 W	100 x 100	3600

Material : Aluminium, CCT : 3000K / 4000K / 6000K



UMPL-16

Model No.	Wattage	Height (MM)
UMPL-16-A	30W x 4	As per requirement

Material : Mild Steel Pole, Cast Aluminium Lighting Fixture
CCT : 3000K / 4000K / 6000K




MODERN POLE LIGHT

UMPL-17

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-17-A	50 W x 2	Ø 165	2000 + 4000 + 6000
UMPL-17-B	50 W x 2	Ø 165	2000 + 6000
UMPL-17-C	50 W x 2	Ø 165	750 + 6000

Material : G.I.Pole
CCT : 3000K / 4000K / 6000K

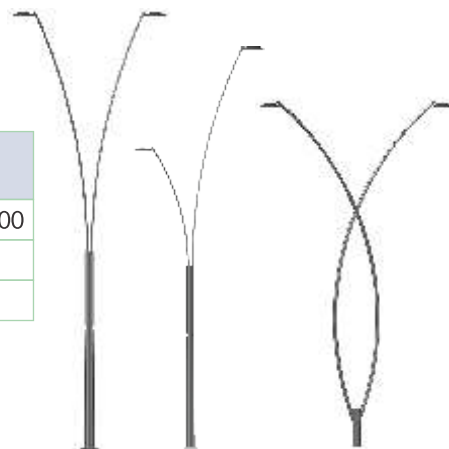

UMPL-18

Model No.	Wattage	Height (MM)
UMPL-18-A	50 W x 4	As per requirement
UMPL-18-B	50 W x 8	As per requirement
UMPL-18-c	50 W x 16	As per requirement

Material : Mild Steel Pole, Cast Aluminium Lighting Fixture,
CCT : 3000K / 4000K / 6000K



UMPL-19

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-19-A	36 W	Ø 75	As per requirement
UMPL-19-B	36 W	Ø 114 x 75	As per requirement
UMPL-19-C	36 W	Ø 114	As per requirement

Material : Mild Steel Pole, Cast Aluminium Lighting Fixture
CCT : 3000K / 4000K / 6000K



MODERN POLE LIGHT

UMPL-20

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-20-A	50 W	Ø 75	As per requirement
UMPL-20-B	50 W	Ø 75	As per requirement
UMPL-20-C	50 W	Ø 75	As per requirement

Material : G.I. Pole, Cast & Extruded Aluminium Lighting
Fixture, CCT : 3000K



UMPL-21

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-21-A	50 W	Ø 75	As per requirement
UMPL-21-B	50 W	Ø 75	As per requirement
UMPL-21-C	100 W	Ø 114 x 75	As per requirement

Material : G.I. Pole, Cast & Extruded Aluminium Lighting
Fixture, CCT : 3000K



UMPL-22

Model No.	Wattage	Height (MM)
UMPL-22-A	50 W	As per requirement
UMPL-22-B	50 W x 2	As per requirement

Material : G.I. Pole, Cast & Extruded Aluminium Lighting
Fixture, CCT : 3000K



MODERN POLE LIGHT



UMPL-23

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-17-A	50 W x 1	Ø 60	As per requirement
UMPL-17-B	50 W x 2	Ø 60	As per requirement


Material : G.I. Pole, Cast & Extruded Aluminium Lighting
Fixture, CCT : 3000K



UMPL-24

Model No.	Wattage	Height (MM)
UMPL-18-A	50 W x 2	As per requirement
UMPL-18-B	50 W	As per requirement
UMPL-18-C	100 W	As per requirement
UMPL-18-D	50 W	As per requirement

Material : G.I. Pole, Cast & Extruded Aluminium Lighting
Fixture, CCT : 3000K / 4000K / 6000K

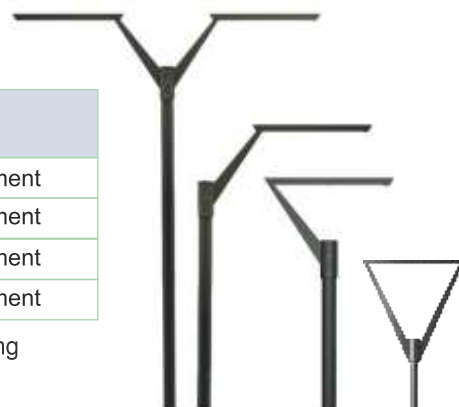

UMPL-25

Model No.	Wattage	Height (MM)
UMPL-19-A	24W, 36W, 50W	As per requirement
UMPL-19-B	24W, 36W, 50W	As per requirement
UMPL-19-C	24W, 36W, 50W	As per requirement

Material : G.I. Pole, Cast & Extruded Aluminium Lighting
Fixture, CCT : 3000K



MODERN POLE LIGHT



UMPL-26

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-20-A	24 W	Ø 60	3000
UMPL-20-B	36 W	Ø 60	3600
UMPL-20-C	50 W	Ø 60	4500

Material : Mild Steel Pole, Cast & Extruded Aluminium Lighting Fixture, CCT : 3000K

UMPL-27

Model No.	Wattage	Height (MM)
UMPL-21-A	30W, 50W, 100W	2400, 3000, 3600
UMPL-21-B	30W, 50W, 100W	2400, 3000, 3600

Material : M.S/G.I Pole,
Fixtures: Polycarbonate diffuser, CCT : 3000K



UMPL-28

Model No.	Wattage	Height (MM)
UMPL-22-A	20W, 24W, 36W	2400, 3000, 3600
UMPL-22-B	20W, 24W, 36W	2400, 3000, 3600

Material : M.S/G.I Pole, CCT : 3000K



MODERN POLE LIGHT



UMPL-29

Model No.	Wattage	Pole Dia (MM)	Height (MM)
UMPL-17-A	50 W x 1	Ø 60	As per requirement

Material : Mild Steel Pole, Cast Aluminium Lighting Fixture
CCT : 3000K / 4000K / 6000K

UMPL-30

Model No.	Wattage	Height (MM)
UMPL-18-A	30W, 50W, 100W	As per requirement
UMPL-18-B	30W, 50W, 100W	As per requirement

Material : Mild Steel Pole, Cast Aluminium Lighting Fixture,
CCT : 3000K / 4000K / 6000K



UMPL-31

Model No.	Wattage	Height (MM)
UMPL-18-A	30W X 1	As per requirement
UMPL-18-B	30W X 2	As per requirement
UMPL-18-C	30W X 3	As per requirement

Material : Mild Steel Pole, Cast Aluminium Lighting Fixture,
CCT : 3000K / 4000K / 6000K

UMPL-32

Model No.	Wattage	Height (MM)
UMPL-20-A	36W, 50W, 100W	3000
UMPL-20-B	36W, 50W, 100W	3600
UMPL-20-C	36W, 50W, 100W	4500

Material : Mild Steel Pole, Cast & Extruded Aluminium Lighting Fixture, CCT : 3000K / 4000K / 6000K



**HERITAGE POLE
LIGHTING**

HERITAGE POLE LIGHT



UHPL-01

Height : 2600 mm x 825 mm
Material : Cast Aluminium
Holder : B 22




UHPL-03

Height : 2550 mm x 835 mm
Material : Cast Aluminium
Holder : B 22




UHPL-05

Height : 2535 mm x 795 mm
Material : Cast Aluminium
Holder : B 22

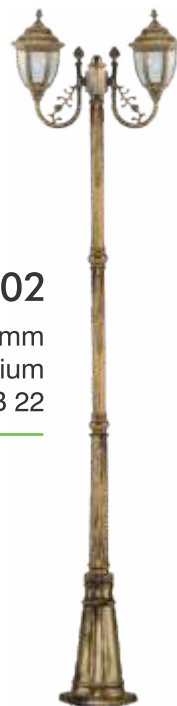

UHPL-02

Height : 2775 mm x 800 mm
Material : Cast Aluminium
Holder : B 22

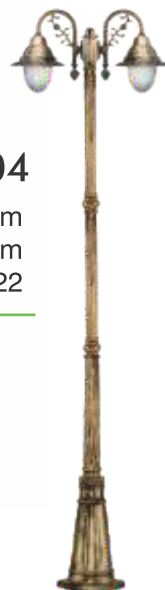

UHPL-04

Height : 2550 mm x 875 mm
Material : Cast Aluminium
Holder : B 22

HERITAGE POLE LIGHT



UHPL-13 UHPL-14 UHPL-15 UHPL-16 UHPL-17

Height : 1825 mm x 200 mm

Material : Cast Aluminium

Holder : B 22

Available in 1225 mm also

HERITAGE POLE LIGHT



UHPL-18



UHPL-19



UHPL-20



UHPL-21



UHPL-22

Height : As per requirement
Material : Cast Iron/
Cast Aluminium

HERITAGE POLE LIGHT



UHPL-23



UHPL-24



UHPL-25



UHPL-26



UHPL-27


Height : As per requirement
Material : Cast Iron/
Cast Aluminium

**POST TOP
LIGHTING**

POST TOP LIGHT

UPTL-01

Size	: 300x400mm, 400x500mm
Material	: Aluminium
Wattage	: 50 W / 100 W
Pipe Dia	: 60mm x 75 mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000 / 12000

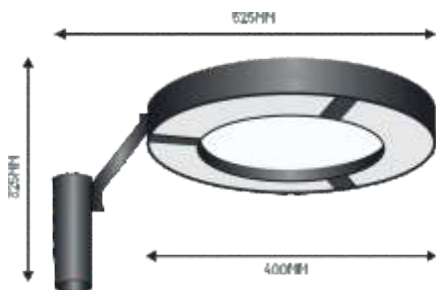

UPTL-02

Size	: 475 mm x 100mm
Material	: Aluminium
Wattage	: 50 W
Pipe Dia	: 60mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000

UPTL-03

Size	: 450 mm x 525 mm
Material	: Aluminium
Wattage	: 50 W / 100 W
Pipe Dia	: 38mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000 / 12000



UPTL-04

Size	: 400 mm X 500 mm
Material	: Aluminium
Wattage	: 50 W / E27 Holder
Pipe Dia	: 38mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000

POST TOP LIGHT

UPTL-05




Size	: 200 mm x 350 mm
Material	: Aluminium
Wattage	: 36 W
Pipe Dia	: 60mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 4320

UPTL-06

Size	: 100 mm x 350 mm
Material	: Aluminium
Wattage	: 50 W
Pipe Dia	: 60mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000



UPTL-07

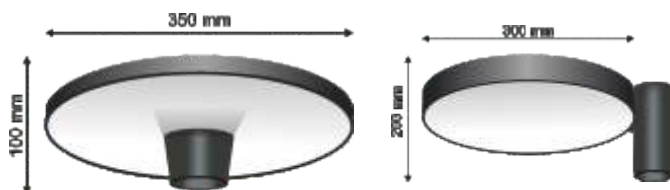

Size	: 200 mm x 300 mm
Material	: Aluminium
Wattage	: 50 W
Pipe Dia	: 60mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000

UPTL-08

Size	: 450 mm x 325 mm
Material	: Aluminium
Wattage	: 50 W
Pipe Dia	: 60mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000



POST TOP LIGHT

UPTL-09

Size	: 700mm x 500mm
Material	: Aluminium
Wattage	: 50 W
Pipe Dia	: 60mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / BRIDGELUX
Lumens	: 6000



UPTL-10 A

Size	: 425 mm x 500mm
Material	: Aluminium
Wattage	: 36W
Pipe Dia	: 75mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / CREE
Lumens	: 4320

UPTL-10 B

Size	: 425 mm x 500mm
Material	: Aluminium
Wattage	: 36W
Pipe Dia	: 75mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / CREE
Lumens	: 4320

UPTL-11A

Size	: 600 mm x 330mm
Material	: Aluminium
Wattage	: 36W
Pipe Dia	: 75mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / CREE
Lumens	: 4320

UPTL-11B

Size	: 605 mm x 335mm
Material	: Aluminium
Wattage	: 30W
Pipe Dia	: 75mm
LED Color	: 3000K / 6000K
LED Make	: OSRAM / CREE
Lumens	: 4320



UPTL-12

Size	: 650 mm x 450mm
Material	: Aluminium
Wattage	: 50W
Pipe Dia	: 75mm
LED Color	: 3000K / 4000K / 6000K
LED Make	: OSRAM / CREE
Lumens	: 6000

POST TOP LIGHT



UPTL-13

Material	: Aluminium, Acrylic
Wattage	: 30 Watt
Body Color	: Black / Gray

UPTL-14

Size	: 300 mm, 450mm, 600 mm
Material	: Aluminium, Acrylic
Holder	: B 22
Body Color	: Black



UPTL-15

Material	: Aluminium, Acrylic
Wattage	: 60 W / 80 W
Body Color	: Gray

High esthetic urban street light made of aluminium with frosted toughened glass to cot glare in european style.

UPTL-16

Size	: 300 mm, 450mm, 600 mm
Material	: Aluminium, Acrylic
Holder	: B 22
Body Color	: Black



UPTL-17

Material	: Aluminium, Acrylic
Wattage	: 30 W
Body Color	: Black / Gray

POST TOP LIGHT



UPTL-19

Material	: Aluminium, Acrylic
Wattage	: 30 Watt
Body Color	: Black / Gray

UPTL-18

Material	: Aluminium, Acrylic
Wattage	: 30 Watt
Body Color	: Black / Gray



UPTL-21-A, 21-B, 21-C

Material	: Aluminium, Acrylic
Wattage	: 36 Watt
Body Color	: Black / Gray

UPTL-20

Material	: Aluminium, Acrylic
Wattage	: 36 Watt
Body Color	: Gray



UPTL-22-A, 22-B, 22-C

Material	: Aluminium, Acrylic
Wattage	: 36 W
Body Color	: Black / Gray

POST TOP LIGHT



UPTL-23

Material	: Aluminium, Acrylic
Wattage	: 50 Watt
Body Color	: Black / Gray

UPTL-24

Material	: Aluminium, Acrylic
Wattage	: 50 Watt
Body Color	: Black / Gray



UPTL-25

Material	: Aluminium, Acrylic
Wattage	: 50 Watt
Body Color	: Black / Gray

UPTL-26

Material	: Aluminium, Acrylic
Wattage	: 50 Watt
Body Color	: Black / Gray



UPTL-27

Material	: Aluminium, Acrylic
Wattage	: 50 Watt
Body Color	: Black / Gray

MODERN POLE

Model No.	Pole Dia (MM)	Height (MM)
UP-001	Ø 60 / Ø 75	2400
UP-002	Ø 60 / Ø 75	3000
UP-003	Ø 60 / Ø 75	3600
UP-004	Ø 114 - 60 / Ø 75	2400
UP-005	Ø 114 - 60 / Ø 75	3000
UP-006	Ø 114 - 60 / Ø 75	3600

Note : MS Tubular Pole of Variable heights upto 9 M with Single / Double arm also available on demand.



HERITAGE POLE

Model No.	Height
UHP-001	1625 mm
UHP-002	2300 mm
UHP-003	2950 mm
UHP-004	1525 mm
UHP-005	As per requirement
UHP-006	As per requirement
UHP-007	As per requirement
UHP-008	As per requirement
UHP-009	As per requirement
UHP-010	As per requirement
UHP-011	As per requirement
UHP-012	As per requirement
UHP-013	As per requirement

Note : Cast Iron / Cast Aluminium Poles with variable height upto 9 Mtr. Single / Double Arms also available on demand.





INDUSTRIAL LIGHTING

ORBIT HIGH BAY LIGHT



Item Code	Input Power	System Lumen
UHBL-01-50	50 Watts	6000
UHBL-01-100	100 Watts	12000
UHBL-01-150	150 Watts	18000
UHBL-01-200	200 Watts	24000
UHBL-01-250	250 Watts	30000

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.95
Color Temperature	3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: > 120 Lumens per Watt
Ingress Protection	: IP65
Life Span	: 75,000 Hours
Mounting	: Surface / Wall Mounted
Housing	: Pressure Die Cast Aluminium
Body Color	: Grey
Cover	: Toughened Glass
High Power SMD LED's	
Inbuilt Electronic Driver with 4 KVA Surge Protection	
Surge Protection upto 10KVA / 20 KVA available on demand	
Available with Optical Lens	



Well Glass



Model No.	Wattage
UWG 030	30 W
UWG 045	45 W
UWG 070	70 W
UWG 090	90 W

Specifications

Material	: Pressure Die Cast Aluminium
LED Color	: 3000 K / 4000 K / 6000 K
Cover	: Glass / Polycarbonate
Mounting	: Suspended / Surface / Wall
Lumen	: 120 Lumen / W
Power Factor	: 230 V AC, > 0.9

Ingress Protection : IP65, Cover : Glass / Polycarbonate







PIT LIGHT (Maintenance Light)

Item Code	Input Power	System Lumen	Size mm (LxBxH)
UMPL-22	22 Watts	2640	290 x 210 x 68
UMP L-16	16 Watts	1920	290 x 210 x 68

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.9
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP67
Life Span	: 75,000 Hours
Mounting	: Surface, Suspended
Housing	: Pressure Die Cast Aluminium
Body Color	: White
Cover	: Toughened Glass
Impact Protection	: IK10





3D PIT LIGHT (Maintenance Light)

Item Code	Input Power	System Lumen	Size mm (LxBxH)
UMPL-3D-22	22 Watts	2640	240 x 130 x 88
UMPL-3D-16	16 Watts	1920	240 x 130 x 88

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.9
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP67
Life Span	: 75,000 Hours
Mounting	: Surface, Suspended
Housing	: Pressure Die Cast Aluminium
Cover	: Toughened Glass
Impact Protection	: IK10

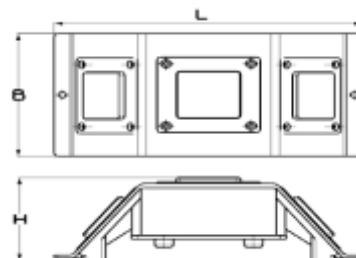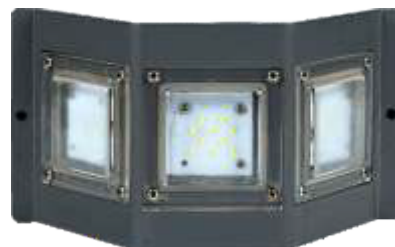

Bulkhead

Item Code	Input Power	System Lumen
UBH 08	10 W	960
UBH 12	20 W	1440

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.9
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP68,
Life Span	: 75,000 Hours
Mounting	: Surface
Housing	: Pressure Die Cast Aluminium
Cover	: Glass Polycarbonate



Industrial Batten



Item Code	Input Power	System Lumen	Size mm
UIB-WP-20	20 Watts	2200	590 x 65 x 71
UIB-WP-40	40 Watts	4400	1190 x 65 x 71
UIB-WP-60	60 Watts	6600	1490 x 65 x 71

Specifications

Input Voltage	: 170 V - 270 V AC
Frequency	: 50 / 60 Hz
Power Factor	: > 0.9
Color Temperature	: 3000 K / 4000 K / 6000 K
Color Rendering Index	: > 70
Lumen Efficacy	: 120 Lumen per Watt
Ingress Protection	: IP65
Life Span	: 75,000 Hours
Mounting	: Recessed, Canopy / Hanging
Housing	: Pressure Die Cast Aluminium
Body Color	: Grey & White
Cover	: Toughened Glass
Surge upto 20 KV and phase to phase protection	



SIGNAGE LIGHTING

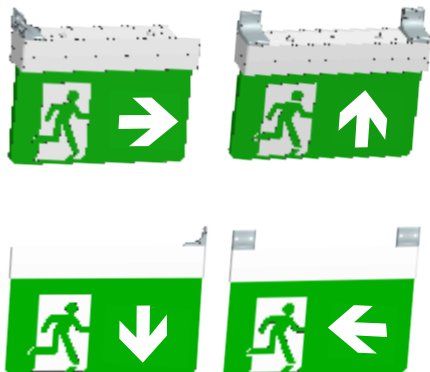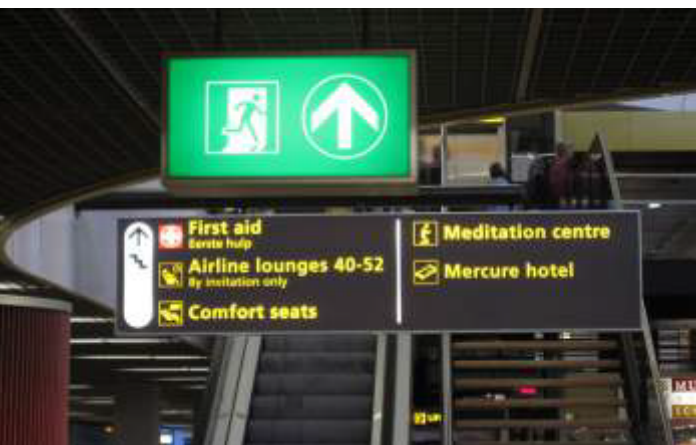

Input Voltage	190 V - 265 V AC
Battery	Self-contained Ni Cd Battery
Battery Back-up	3 Hours
Frequency	50/60 Hz
Colour Temperatures	6000 K
Optics	Acrylic Diffuser
Average Luminance (White)	avg 500 cd/m2
Uniformity	avg 0.2
Function Test	Weekly 5 Minutes Test Duration
Duration Test	The 52 nd Function Test is a Duration Test of 3 Hours
Green Continuously	Mains Available, Charging OK
Off	No Mains Available or Emergency Mode
Red Flashing (1Hz)	Lamp Source Faulty
Red Continuously	Battery Failure
Red / Green Alternating	Test Mode
Light source	LED
Dimensions	266X212X45X11 in mm
Applications	Airport Station Office Complex Shopping Mall Hotel Hospital Cinema Hall Convention Hall Exhibition Hall Sports Stadium Apartment Complex

EMERGENCY LIGHTING

Self-Contained Emergency luminaire

Self-contained LED emergency light with self-extinguishing RAL2407 white polycarbonate body. False ceiling/wall mounting installation. power supply 220/230 Vac, 50-60 Hz. It's a maintained and Non-maintained type luminaire. Escape and Area optics have been used for exit areas of building, Shopping Complex, Hotels, Restaurants, Offices, Convention Centre, Exhibition Hall, Cinemas, Hospitals, Apartment, Complexes etc. Rechargeable LiFePo battery @ 1 Ah included; charging time 6 H;. Emergency power duration 3 H. Protection rating IP65 operating temperature 0 °C - 50 °C.



TECHNICAL DATA

Installation	False ceiling / wall Mounting
Power supply	220/230 V ~, 50-60 Hz
Absorbed power in W @ Maintained Mode	7 W
Battery Charging Voltage	10.5 V
Forward Voltage (Vf)	6 V
Forward Current (If)	350 mA
Battery	LiFePO 11.1 V @ 1 Ah
Emergency Power Duration	3 Hr
Total charging time	6 Hr
Top Cover	White Polycarbonate RAL2407
Bottom	White Polycarbonate RAL2407
Glow wire	850 °C
IP Protection rating	IP 54
IK Protection rating	Ik07
Insulation class	II
Operating temperature	0° - 50 °C
Maintained mode information	Dedicated terminal 230 V ~
Compliant to standards	EN 60598-1, EN 60598-2-22, EN 61547 EN 55015, EN 61000-3-2, EN 61000-3-3 EN 61347-1, EN 61347-2-7
Light source	LED
Colour temperature	3000K, 4000, 5700K
Min. luminous flux in emergency	250 lm
Module dimensions	100X100X20 in mm



A photograph of a classical building facade at night, illuminated with vibrant rainbow-colored lights. The building features four large columns and a pediment. The lighting transitions from red on the left, through yellow, green, blue, and purple on the right. The text "FACADE LIGHTING" is overlaid in the center.

FACADE LIGHTING




Mono / RGBW Wall Washer

Model No.	Size (mm)	Wattage	System Lumen	CCT
UWWM-6012-M	600	12	≥ 1260	NW/CW/WW
UWWR-6012-R	600	12	≥ 600	RGBW
UWWM-6016-M	600	16	≥ 1680	NW/CW/WW
UWWR-6016-R	600	16	≥ 800	RGBW
UWWM-6020-M	600	20	≥ 2100	NW/CW/WW
UWWR-6020-R	600	20	≥ 1000	RGBW
UWWM-6024-M	600	24	≥ 2520	NW/CW/WW
UWWR-6024-R	600	24	≥ 1200	RGBW


BIS APPROVED

Specifications


Input Voltage	: 140 - 270 VAC
Power Factor	: > 0.9
Ingress Protection	: IP66
Color Rendering Index	: > 70
Life Span	: 60000 Hours
Protector	: Toughened Glass
Working Temp. Range	: Up to +45 deg C
Working Humidity Range	: 0-95%
Material	: Aluminium Extrusion
Beam Angle Degree	: 10/25/40/Sym/Asym
Impact Protection	: IK 07

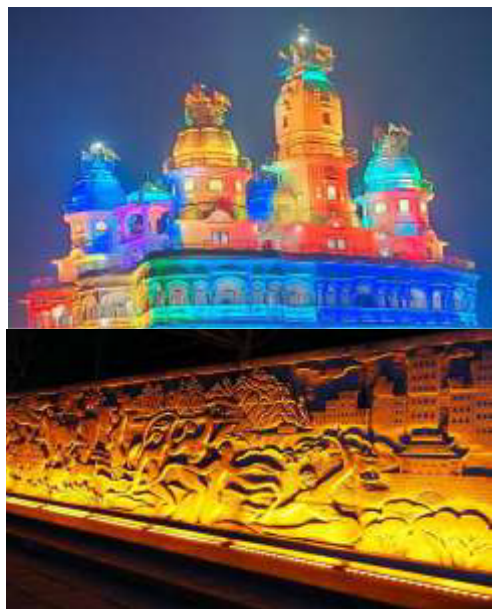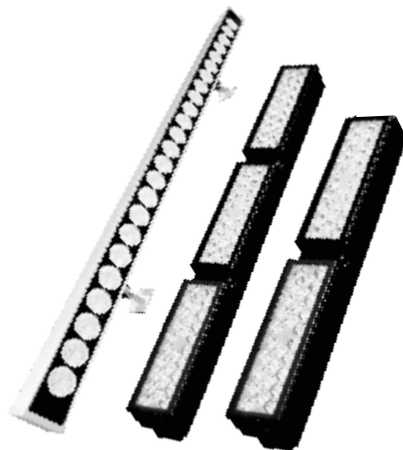


4°




9°



25°




30X15°




40°

Mono / RGBW Wall Washer

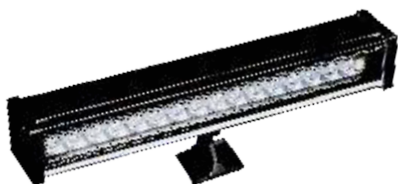


Model No.	Size (mm)	Wattage	System Lumen	CCT
UWWM-3012-M	300	12	≥ 1260	NW/CW/WW
UWWR-3012-R	300	12	≥ 600	RGBW
UWWM-3016-M	300	16	≥ 1680	NW/CW/WW
UWWR-3016-R	300	16	≥ 800	RGBW

BIS APPROVED

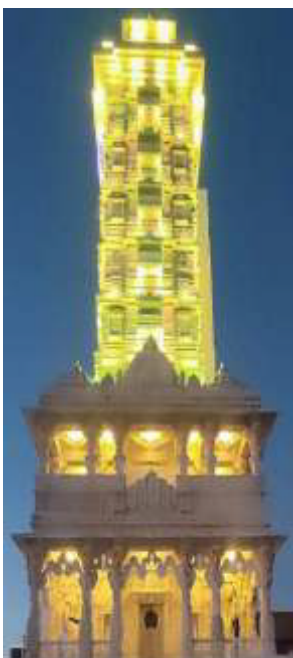


Specifications

Input Voltage	: 140 - 270 VAC
Power Factor	: > 0.9
Ingress Protection	: IP66
Color Rendering Index	: > 70
Life Span	: 60000 Hours
Protector	: Toughened Glass
Working Temp. Range	: Up to +45 deg C
Working Humidity Range	: 0-95%
Material	: Aluminium Extrusion
Beam Angle Degree	: 10/25/40/Sym/Asym
Impact Protection	: IK 07




4°



9°




25°



30X15°



40°

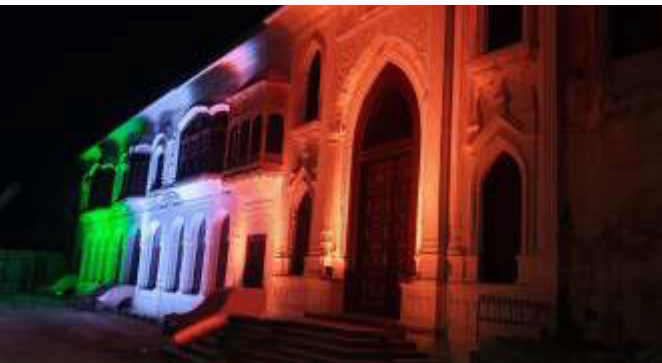

Mono / RGBW Wall Washer

Model No.	Size (mm)	Wattage	System Lumen	CCT
UWWR-1016-M	1020	16	≥ 1600	NW/CW/WW
UWWR-1016-R	1020	16	≥ 800	RGBW
UWWM-1024-M	1020	24	≥ 2400	NW/CW/WW
UWWR-1024-R	1020	24	≥ 1200	RGBW
UWWM-1040-M	1020	40	≥ 4000	NW/CW/WW
UWWR-1040-R	1020	40	≥ 2000	RGBW
UWWM-1060-M	1020	60	≥ 6000	NW/CW/WW
UWWR-1060-R	1020	60	≥ 3000	RGBW



BIS APPROVED

Specifications

Input Voltage	: 140 - 270 VAC
Power Factor	: > 0.9
Ingress Protection	: IP66
Color Rendering Index	: > 70
Life Span	: 60000 Hours
Protector	: Toughened Glass
Working Temp. Range	: Up to +45 deg C
Working Humidity Range	: 0-95%
Material	: Aluminium Extrusion
Beam Angle Degree	: 10/25/40/Sym/Asym
Impact Protection	: IK 07



Mono Color Flood Light




Model No.	Wattage	System Lumen	CCT
UFLM-50-M	50	7000	NW/CW/WW
UFLM-60-M	60	8400	NW/CW/WW
UFLM-100-M	100	14000	NW/CW/WW
UFLM-150-M	150	21000	NW/CW/WW
UFLM-200-M	200	28000	NW/CW/WW
UFLM-250-M	250	35000	NW/CW/WW
UFLM-300-M	300	42000	NW/CW/WW
UFLM-500-M	500	7000	NW/CW/WW

BIS APPROVED

Specifications


Input Voltage	: 140 - 270 VAC
Power Factor	: > 0.9
Ingress Protection	: IP66
Color Rendering Index	: > 70
Life Span	: 60000 Hours
Protector	: IP Lens with silicon sheet
Working Temp. Range	: Up to +45 deg C
Working Humidity Range	: 0-95%
Material	: Aluminium Extrusion
Beam Angle Degree	: 10/25/40/Sym/Asym
IK	: 10

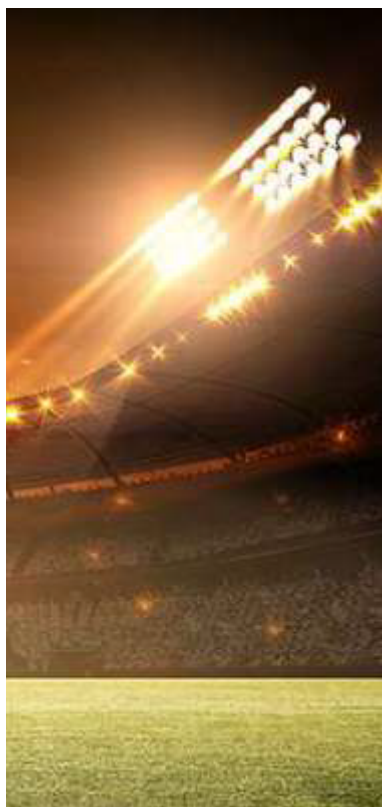

10°




30°




60°




TYPE II



90°



TYPE II

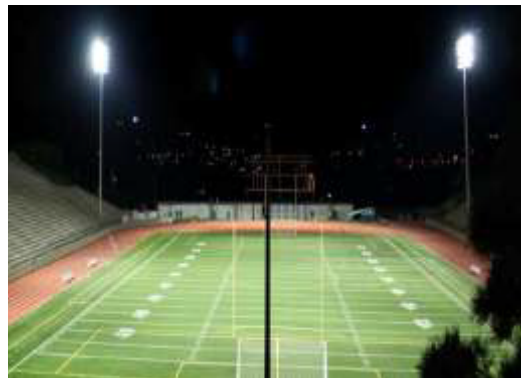

RGB / RGBW Flood Light

Model No.	Wattage	System Lumen	CCT
UFLM-50-R	50	2500	RGBW
UFLM-90-R	90	4500	RGBW
UFLM-100-R	100	5000	RGBW
UFLM-120-R	120	6000	RGBW
UFLM-150-R	150	7500	RGBW
UFLM-175-R	175	8750	RGBW

BIS APPROVED

Specifications




Input Voltage	: 140 - 270 VAC
Power Factor	: > 0.9
Ingress Protection	: IP66
Color Rendering Index	: > 70
Life Span	: 60000 Hours
Protector	: Toughened Glass
Working Temp. Range	: Up to +45 deg C
Working Humidity Range	: 0-95%
Material	: Aluminium Extrusion
Beam Angle Degree	: 10/25/40/Sym/Asym
IK	: 10



10°



60°

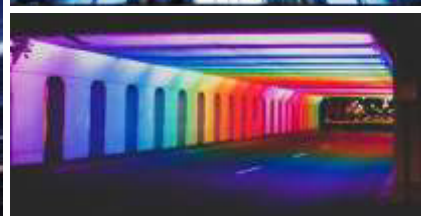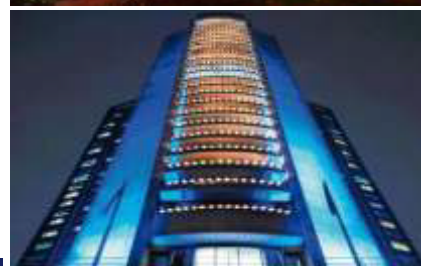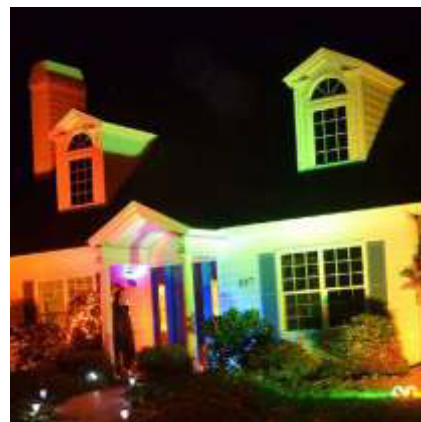


RGBW Round Flood Light



Model No.	Wattage	System Lumen	CCT
URFL-24-R	24	1200	RGBW
URFL-32-R	32	1600	RGBW
URFL-40-R	40	2000	RGBW
URFL-60-R	60	3000	RGBW
URFL-84-R	84	4200	RGBW
URFL-120-R	120	6000	RGBW
URFL-180-R	180	9000	RGBW

BIS APPROVED

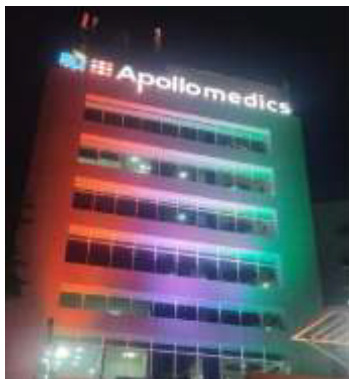

Specifications

Input Voltage	: 140 - 270 VAC
Power Factor	: > 0.9
Ingress Protection	: IP66
Color Rendering Index	: > 70
Life Span	: 60000 Hours
Protector	: IP Lens with silicon sheet
Working Temp. Range	: Up to +45 deg C
Working Humidity Range	: 0-95%
Material	: Aluminium Extrusion
Beam Angle Degree	: 10/25/40/Sym/Asym
IK	: 10

FEATURES:

Installation Holder	Stainless steel
Working Temperature	-25°C to +50°C
Beam Angle	20° / 40° / 60°
CCT	3000 K / RGB / RGBW

- Nicely outlooking extra slim design.
- Glueless construction waterproof design
- Trimless design
- The light transmittance of tempered glass is more than 92%
- Rotary support with locking system

NEON (Linear Flexible Light)

Mid Power LED linear Flexible light, with full glow and complete homogeneous throw of RGBW Light, Can be cut in customised size and shapes with permissible bending techniques. Easy to be installed with various Connectors accessories.

GENERAL SPECIFICATIONS

Surface Mounted IP 65

OPTICAL Direct Illumination

PHYSICAL

Silicon and High Grade
Non Yellowing Cover

SYSTEM POWER 10/16W RGBW

LED





Mid Power LED
3000K, 4000K
R/G/B/W

ELECTRICAL

DMX512 Programmable
24V DC

IP 68 Connector

Surface Mounted with adjustable mounting
accessories available as per design

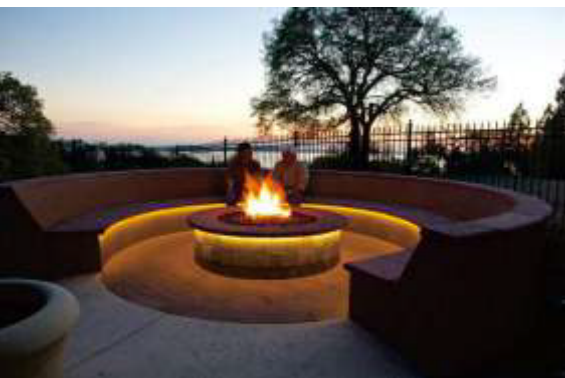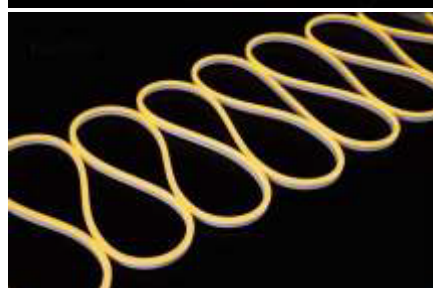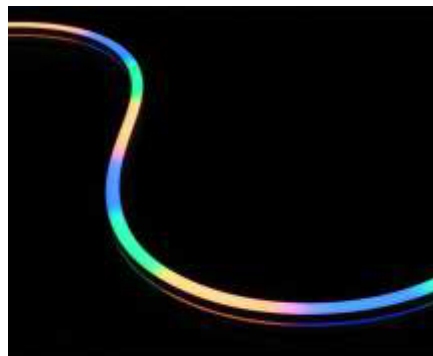




DOT PIXEL Light

Model No.	Wattage	Beam Angle	CCT
UDPL-07-R	0.70	120° / 160°	RGBW
UDPL-15-R	1.50	120° / 160°	RGBW
UDPL-02-R	2.00	120° / 160°	RGBW
UDPL-04-R	4.00	120° / 160°	RGBW
UDPL-06-R	6.00	120° / 160°	RGBW
UDPL-08-R	8.00	120° / 160°	RGBW
UDPL-09-R	9.00	120° / 160°	RGBW

LED dot light source is a new type of energy-saving and environment protection decorative lamp. The design is exquisite and beautiful, and can be combined with the curtain wall structure as a decorative lighting for the building. The dot matrix screen can be formed to realize the self-illuminating illumination effect of the facade or structure surface of the building. High transmittance optical grade PC. Special sealing process, whole lamp IP67 protection. Installation method surface mounting for cable through steel wire.

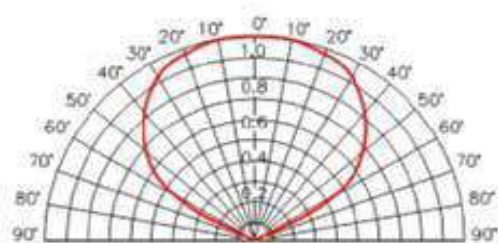

Specifications


Input Voltage	: 12 V - 24 V DC
Ingress Protection	: IP67
Color Rendering Index	: > 80
Life Span	: 50000 Hours
Control	: On-off/DMX512
Working Temperature	: -20°C to +55°C



Surface Mount



Steel Cable Install



Aluminium Slot Install




FLEXIBLE WALL WASHER

The flexible wall washer mono is a versatile lighting fixture designed for illuminating walls with a single, adjustable light source. Its flexibility allows for customized lighting effects, making it suitable for various applications such as accentuating architectural features or creating ambient lighting in different spaces. The mono design implies a single light element, providing a focused and controllable illumination for aesthetic or functional purposes.






14X60°

Product	Flexible Wall Washer
Nominal Voltage	24VDC/220~240VAC
Luminous Flux (lm)	876
Color Temperature (K)	2700, 4000, 5700 K
System Luminous Efficacy (lm/W)	CRI ≥ 70
Optic Material	PC/PMMA
Protector	IP Lens with Silicon Gasket
Standard Colours(s)	Light Grey
Operating Temperature	Up to +45° C
Electrical Class	Class I
Housing Finish	Anodized
Housing	Aluminum Extrusion
IP Rating	Ip66
IK Rating	Ik07
Electromagnetic Compliance (Optional)	EN 55015:2013/A1:2015, EN 61000-4, -3, -4, -5, -8, -11:201, EN -2, -3:2013
Power Factor (at Full load)	0.9
Surge Protection Options (kV)	10kV
Inbuilt Surge Protection Options (kV)	4kV / 6kv
Beam Angle	14X60°

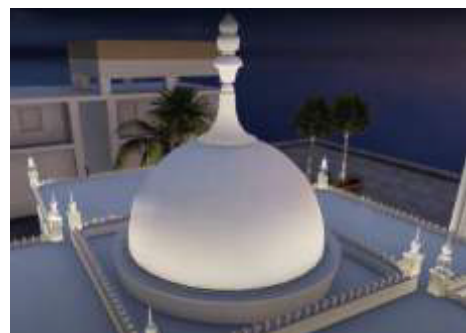

FLEXIBLE WALL WASHER

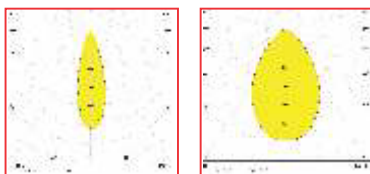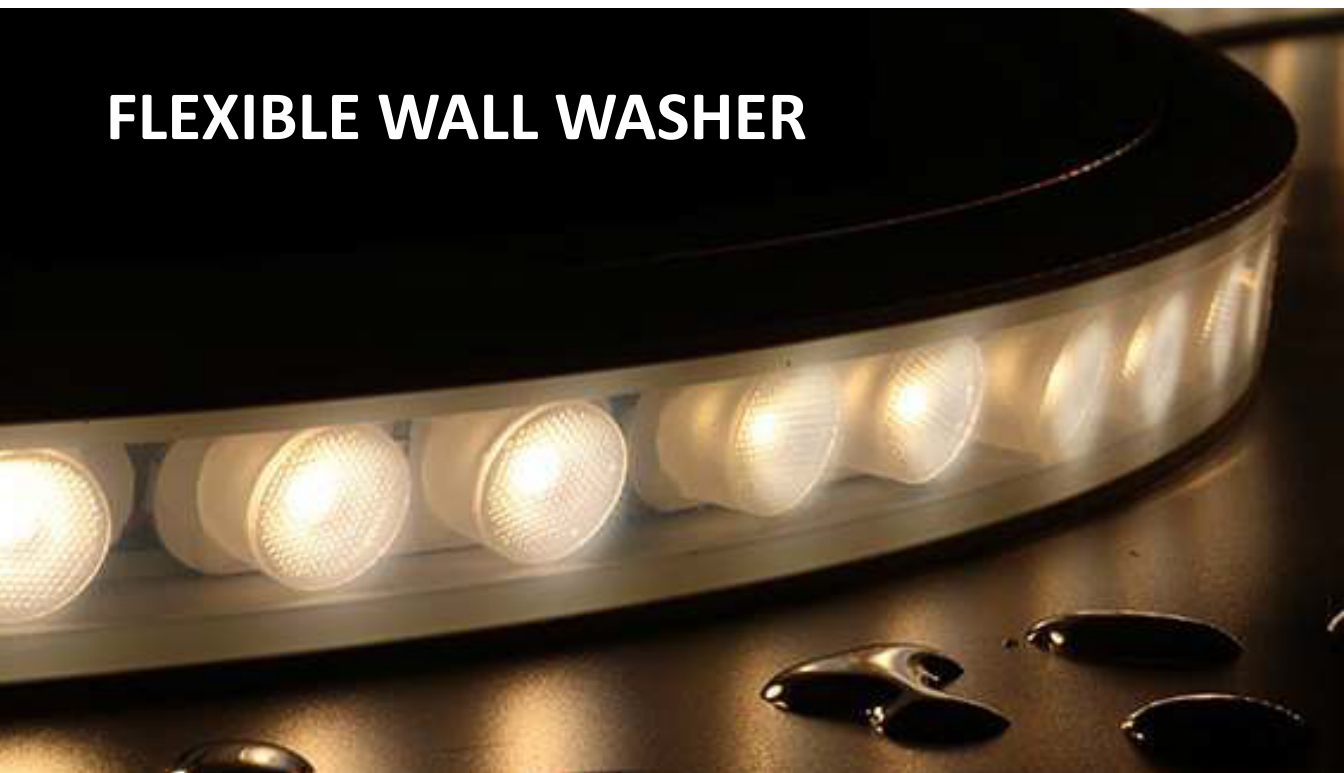

Product	Flexible Wall Washer
LED Type	SMD3030
Beam Angle	30°, 45°, 60°
Led/M	48
Bending Direction	3D
Color	Static Color-White
Power Per Meter	24W
Control Mode	Switch/Dimming
Working Temperature	-20°C-45°C
Voltage	DC24V
Lumens Output	3000K-1230lm/M 4000K-1295lm/M 5000K-1290lm/M 6000K-1285lm/M



MARKER Light

Model No.	Wattage	LED LIFETIME	CCT
UML-12-W	12	5000 H	3000 K
UML-12-R	12	5000 H	RGB
UML-12-RW	12	5000 H	RGBW

FEATURES:

Housing	Die-casting aluminium
Housing Color	Black
Finishes	Anodized aluminium
Installation Holder	Stainless steel
Protection	IP65
Working Temperature	-25°C to +50°C
Beam Angle	20° / 40° / 60°
CCT	3000 K / RGB / RGBW




- Nicely outlooking extra slim design.
- Glueless construction waterproof design
- Trimless design
- The light transmittance of tempered glass is more than 92%
- Rotary support with locking system





**MOTIF
LIGHTING**

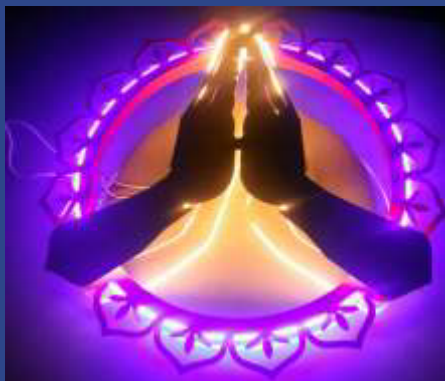


Model-UM01



Model-UM02



Model-UM03

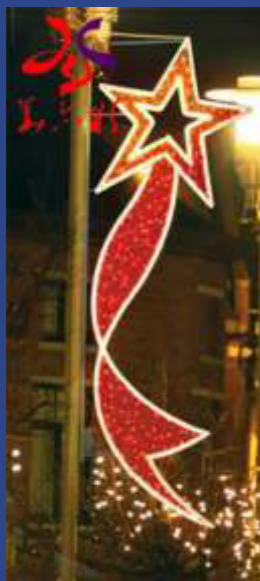

Model-UM04



Model-UM05



Model-UM06

Model-UM07



Model-UM08




Model-UM09



Model-UM10



Model-UM12

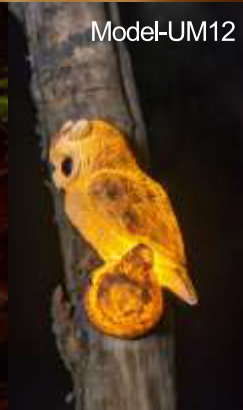

Model-UM11

Model-UM12



Model-UM13



Model-UM14



Model-UM15



Model-UM16



Model-UM17



Model-UM18



Model-UM19



Model-UM20



Model-UM21



Model-UM22



Model-UM23



Model-UM24



Model-UM25



Model-UM26



Model-UM27




Model-UM28




Model-UM29



Model-UM30



Model-UM31



Model-UM32






Model-UM33



Model-UM34

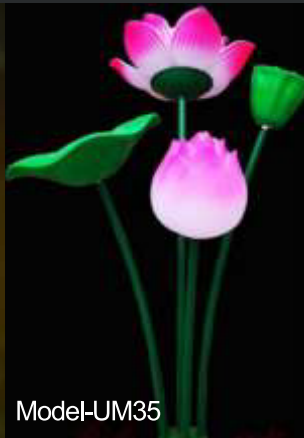

Model-UM35



Model-UM36




Model-UM37



Model-UM38



Model-UM39

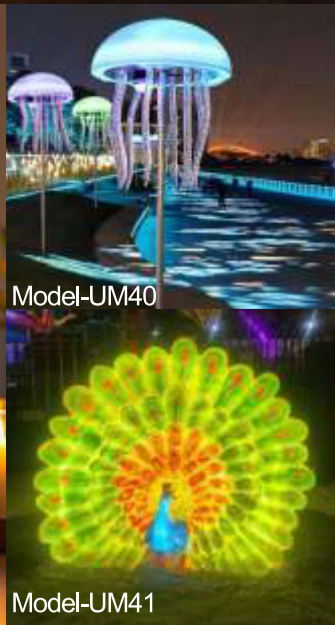

Model-UM40

Model-UM41



Unicor Lights



unicor_lights_



Unicor Lights



Unicor Lights



info@unicor.in



www.unicor.in

